

**Homeline Standard Plug-On Circuit Breakers**

The Square D Homeline circuit breakers are in a 1 in. wide format for 1-pole circuit breakers. They are designed to plug into Homeline load centers.

**Table 1.39: Standard HOM Plug-on Circuit Breakers**

Ampere Rating	AIR	1P—120 Vac, 1 Space Required	2P—120/240 Vac Common Trip 2 Spaces Required.
15 A	10 kA	HOM115 [1][2]	HOM215 [2]
20 A	10 kA	HOM120 [1][2]	HOM220 [2]
25 A	10 kA	HOM125 [2]	HOM225 [2]
30 A	10 kA	HOM130 [2]	HOM230 [2]
35 A	10 kA	—	HOM235 [2]
40 A	10 kA	HOM140 [2]	HOM240 [2]
45 A	10 kA	—	HOM245 [2]
50 A	10 kA	HOM150 [2]	HOM250 [2]
60 A	10 kA	—	HOM260 [2]
70 A	10 kA	—	HOM270 [2]
80 A	10 kA	—	HOM280 [2]
90 A	10 kA	—	HOM290 [2]
100 A	10 kA	—	HOM2100 [2]
110 A	10 kA	—	HOM2110 [2]
125 A	10 kA	—	HOM2125 [2]
150 A	10 kA	—	HOM2150BB [2][3]
175 A	10 kA	—	HOM2175BB [2][3]
200 A	10 kA	—	HOM2200BB [2][3]

**Homeline High Magnetic Circuit Breakers (HOM-HM)**

High magnetic trip circuit breakers are recommended for applications where high initial inrush current may occur.

**Table 1.40: HOM-HM Circuit Breakers**


Amperes	1P—120/240 Vac	2Ps
15 A	HOM115HM [2]	—
20 A	HOM120HM [2]	—

**Homeline Ground-Fault Circuit Breaker (HOM-GFI)**

HOM-GFI circuit breakers provide overload and short circuit protection, combined with Class A ground fault protection. Class A denotes a ground fault circuit interrupter that will trip when a fault current to ground is 6 milliamperes or more.

**Table 1.41: HOM-GFI Circuit Breakers**

Circuit Breaker Type	Ampere Rating	AIR	1P—120 Vac 1 Space Required	2P—120/240 Vac Common Trip 2 Spaces Required
Ground-Fault Circuit Interrupter(Pigtail Neutral)	15 A	10 kA	HOM115GFI	HOM215GFI
	20 A	10 kA	HOM120GFI	HOM220GFI
	25 A	10 kA	—	HOM225GFI
	30 A	10 kA	—	HOM230GFI
	35 A	10 kA	—	HOM235GFI
	40 A	10 kA	—	HOM240GFI
	45 A	10 kA	—	HOM245GFI
	50 A	10 kA	—	HOM250GFI
Plug-On Neutral Ground-Fault Circuit Interrupter	15 A	10 kA	HOM115PGFI[4]	—
	20 A	10 kA	HOM120PGFI[4]	—

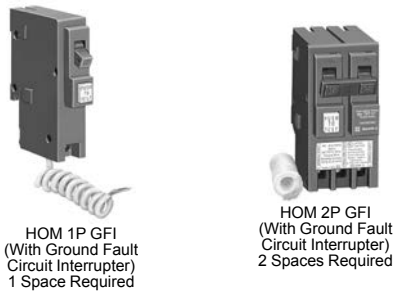

**Homeline Combination Arc Fault Circuit Interrupters (HOM-CAFI)**

Homeline Combination Arc Fault Circuit Interrupters—Provide overload and short circuit protection, plus arc fault protection in accordance with the NEC and UL 1699.

**Table 1.42: HOM-CAFI Circuit Breakers**

Circuit Breaker Type	Ampere Rating	Poles 120 Vac	Cat. No.
<b>One-Pole</b>			
Combination Arc-Fault Circuit Interrupter with Pigtail Neutral	15 A	1	HOM115CAFI [2]
	20 A	1	HOM120CAFI [2]
Plug-On Neutral Combination Arc-Fault Interrupter	15 A	1	HOM115PCAFI [2]
	20 A	1	HOM120PCAFI [2]
<b>Two-Pole</b>			
Combination Arc-Fault Circuit Interrupter with Pigtail Neutral	15 A	2	HOM215CAFI [2] [5]
	20 A	2	HOM220CAFI [2] [5]



[1] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.

[2] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

[3] Requires four spaces (1 AWG–300 kcmil Al/Cu). Use only in 1Ø panel rated 150 A or greater.

[4] New Plug-on Neutral

[5] For 120/240 V only, not for 208Y/120 V.

Table 1.84: All-in-One Combination Service Entrance Devices

Surface and Semiflush Mount <sup>[56]</sup>																
Ring Type, Homeline																
300 A	Class 320 Manual	UG	—	25 kA	SU3040D300CB <sup>[57][58]</sup> <sup>[59]</sup>	1	QDL22200 <sup>[60]</sup> QDL, QGL, QJL <sup>[61]</sup>	200 A 100 A	30	40	10	200 A	A-L	(2) Studs	4-250	100, 4
					SU3040D300FB <sup>[57][58]</sup> <sup>[59]</sup>											
400 A	None	UG	UG	25 kA	SU3040D400CN <sup>[57]</sup> <sup>[58]</sup>	1	QDL22200 <sup>[60]</sup> QDL, QGL, QJL <sup>[61]</sup>	200 A 200 A	30	40	10	200 A	A-L	(2) Studs	4-250	100, 4
					SU3040D400FN <sup>[57][58]</sup> <sup>[59]</sup>											
400 A	Class 320 Manual	UG	—	25 kA	SU3040D400CB <sup>[57][58]</sup> <sup>[59]</sup>	1	QDL22200 <sup>[60]</sup>	200 A	30	40	10	200 A	A-L	(2) Studs	4-250	100, 4
					SU3040D400FB <sup>[57][58]</sup> <sup>[59]</sup>											
Ringless, Homeline																
400 A	Class 320 Lever	UG	—	25 kA	RU3040D400CL <sup>[58][62]</sup> <sup>[59]</sup>	1	QDL22200 <sup>[60]</sup>	200 A	30	40	10	200 A	A-L	(2) Studs	4-250	100, 4
					RU3040D400FL <sup>[58][62]</sup> <sup>[59]</sup>											
400 A	K-4 Bolt-on	UG	—	25 kA	RU3040D400CK <sup>[58]</sup> <sup>[59]</sup>	1	QDL22200 <sup>[60]</sup> QDL, QGL, QJL <sup>[61]</sup>	200 A 200 A	30	40	10	200 A	A-L	(2) Studs	4-250	100, 4
					RU3040D400FK <sup>[58][59]</sup>											

Circuit Breakers for CSEDs

Table 1.85: Circuit Breakers for use with Meter Mains and All-In-One Devices

Ampere Rating <sup>[63]</sup>	Type: HOM, 1P	Type: HOM, 2P	Type: QO, 1P	Type: QO, 2P	Type: QO-VH, 1P	Type: QO-VH, 2P
	Cat. No. (DE3D)	Cat. No. (DE3D)	Cat. No. (DE2A)	Cat. No. (DE2A)	Cat. No. (DE2A)	Cat. No. (DE2A)
10	—	—	QO110	—	—	—
15	HOM115	—	QO115	—	QO115VH	—
20	HOM120	—	QO120	—	QO120VH	—
25	HOM125	—	QO125	—	QO125VH	—
30	HOM130	HOM230	QO130	QO230	QO130VH	QO230VH
35	—	HOM235	QO135	QO235	—	—
40	HOM140	HOM240	QO140	QO240	—	QO240VH
45	—	HOM245	QO145	QO245	—	—
50	HOM150	HOM250	QO150	QO250	—	QO250VH
60	—	HOM260	QO160	QO260	—	QO260VH
70	—	HOM270	QO170	QO270	—	QO270VH
80	—	HOM280	—	QO280	—	QO280VH
90	—	HOM290	—	QO290	—	QO290VH
100	—	HOM2100	—	QO2100	—	QO2100VH
110	—	HOM2110	—	QO2110	—	QO2110VH
125	—	HOM2125	—	QO2125	—	QO2125VH
150	—	HOM2150BB	—	QO2150	—	QO2150VH
175	—	HOM2175BB	—	QO2175	—	QO2175VH
200	—	HOM2200BB	—	QO2200	—	QO2200VH

Ampere Rating <sup>[63]</sup>	Type: QOM1-VH, 2P	Type: QOM2-VH, 2P	Type: QDL, 2P <sup>[64]</sup>
	Cat. No. (DE3D)	Cat. No. (DE3D)	Cat. No. (DE2A)
50	QOM50VH <sup>[65]</sup>	—	—
60	QOM60VH	—	—
70	QOM70VH	—	QDL22070
80	QOM80VH	—	QDL22080
90	QOM90VH	—	QDL22090
100	QOM100VH	QOM2100VH	QDL22100
110	QOM110VH	—	QDL22110
125	QOM125VH	QOM2125VH	QDL22125
150	—	QOM2150VH	QDL22150
175	—	QOM2175VH	QDL22175
200	—	QOM2200VH	QDL22200
225	—	QOM2225VH	—

<sup>[56]</sup> UL short circuit current rating is equal to the lowest interrupting rating of any circuit breaker installed.  
<sup>[57]</sup> For use only on 120/240 Vac 1Ø3W system (4-jaw meter socket).  
<sup>[58]</sup> Knockout provided in cover for use with barrel lock kit SCBRLLLOCK (see Accessories).  
<sup>[59]</sup> Device configuration is not included in EUSERC standards. Consult applicable utility for acceptance.  
<sup>[60]</sup> Service disconnect supplied factory-installed.  
<sup>[61]</sup> Additional service disconnect for field-installation: order prefix QBL at 10 kA, QDL at 25 kA, QGL at 65 kA, or QJL at 100 kA. Order separately. For complete circuit breaker catalog number, see Digest Section 7.  
<sup>[62]</sup> 5th jaw factory-installed.  
<sup>[63]</sup> Do not exceed mains rating of device  
<sup>[64]</sup> For additional interrupting rating circuit breakers, order circuit breaker prefix QBL at 10 kA, QGL at 65 kA or QJL at 100 kA.  
<sup>[65]</sup> Reference National Electrical Code Article 230-79.