







REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	9/2/2008	



- 1 = DRAIN
- 2 = +V
- 3 = -V
- 4 = CAN\_H
- 5 = CAN\_L



- 1 = -V
- 2 = CAN\_L
- 3 = DRAIN
- 4 = CAN\_H
- 5 = +V

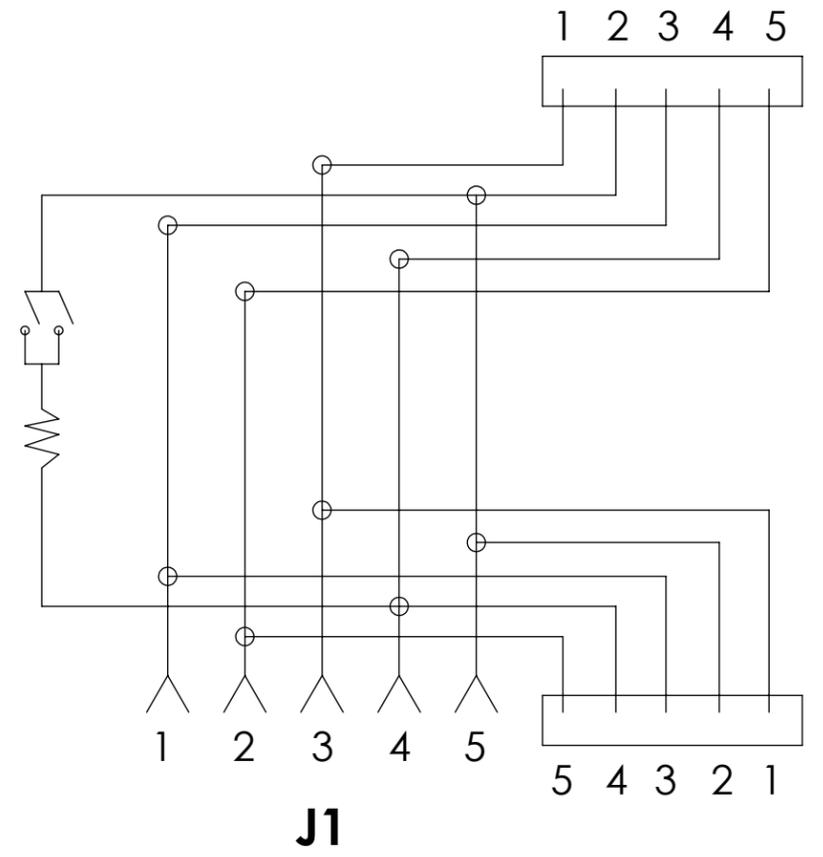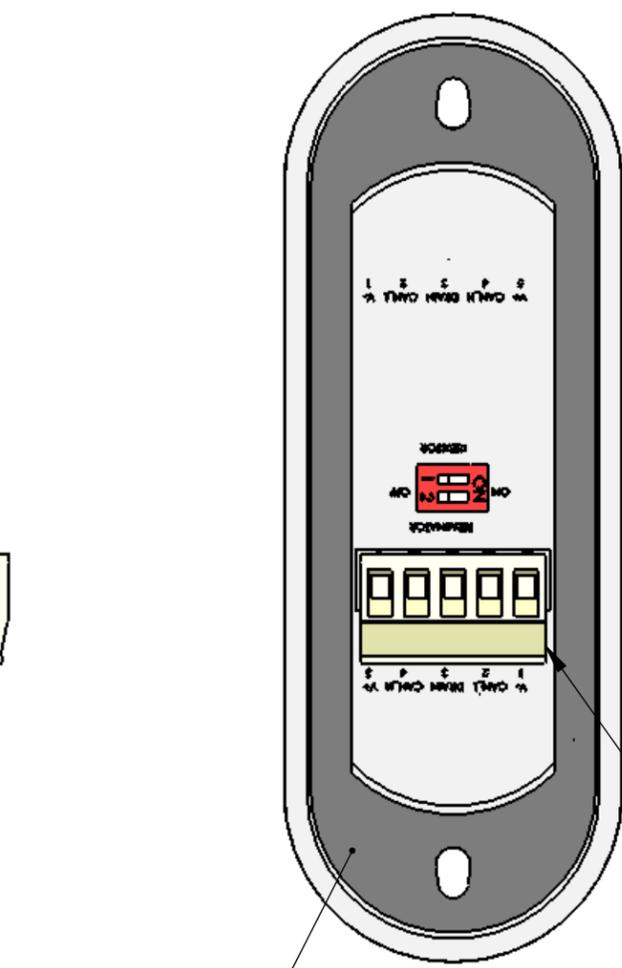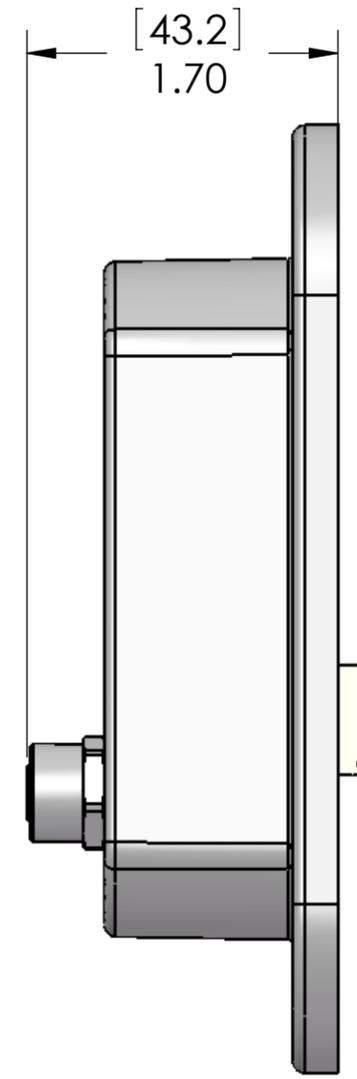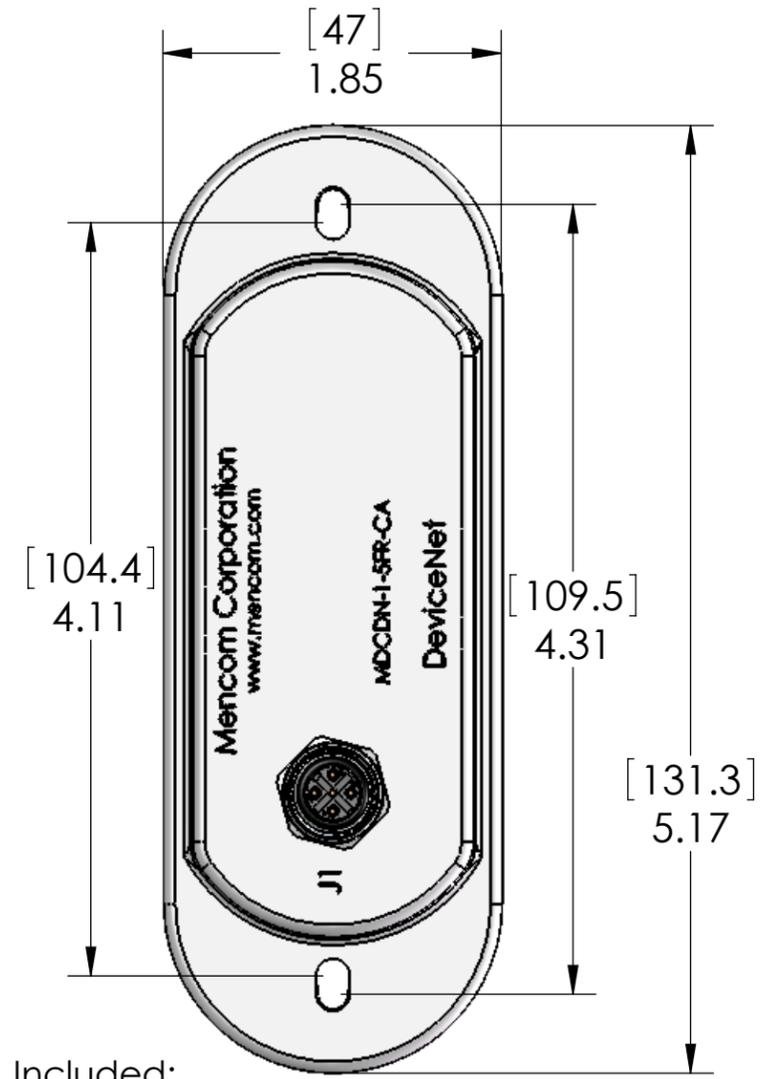

TERMINAL BLOCK PLUG INCLUDED

Included:

- 2 each 10-24 screws (for Form8 conduit bodies)
- 2 each 8-32 screws (for Mark 9 conduit bodies)

Can be mounted to 3/4" Form 8, Mark 9 and standard conduit bodies.

SPECIFICATIONS:	
HOUSING MATERIAL	GLASS FILLED PBT
RECEPTACLE HOUSING:	ANODIZED ALUMINUM
RECEPTACLE INSERT:	YELLOW PVC
RECEPTACLE CONTACTS:	GOLD PLATED COPPER ALLOY
OPERATING VOLTAGE:	40V
OPERATING CURRENT:	4A
OPERATING TEMPERATURE	-40°C - +70°C

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME
DIMENSIONS ARE IN INCHES AND [MM]	BEM
	DRAWN
	CHECKED
	ENG APPR.
	MFG APPR.
	Q.A.
	COMMENTS:
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
<b>B</b>	<b>MDCDN-1-5FR-CA</b>	<b>A</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1