



MDC (M12) Series Receptacles

6, 8 10 & 12 Conductor MDC Series Receptacles




Solder Cup Receptacles | 1/2"-14 NPT & Metric Threads | 60V, 2A | Non-UL | IP67 Rating

H
Micro-DC (M12) Series Receptacles


# of Poles	Male Faceview	Rating	Wire AWG	1/2" - 14 NPT Threads		M20 x 1.5 Threads	
				Male Receptacles	Female Receptacles	Male Receptacles	Female Receptacles
6	 M12 x 1	60V 2A MAX	24 AWG MAX	MDC-6MR-2-SC	MDC-6FR-2-SC	MDC-6MR-M20-SC	MDC-6FR-M20-SC
8	 M12 x 1	60V 2A MAX	24 AWG MAX	MDC-8MR-2-SC	MDC-8FR-2-SC	MDC-8MR-M20-SC	MDC-8FR-M20-SC

Other mounting threads are available, please consult the factory.
Stainless Steel is available for the 1/2" NPT version, add a "-SS" suffix (e.g. MDC-8MR-2-SC becomes MDC-8MR-2-SC-SS).

1/2"-14NPT Threads

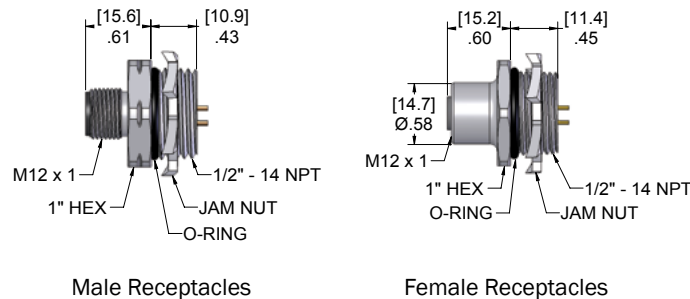

M20 Threads

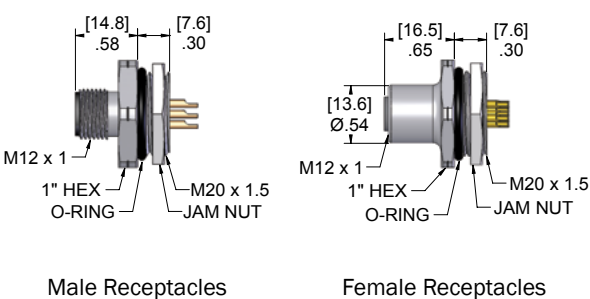

Specifications:

Shell:	1/2"-14NPT: Clear Anodized Aluminum	Lock Nut:	Zinc Plated Steel
	M20 x 1.5: Nickel Plated Brass	Jam Nut:	Nickel Plated Brass
Insulator:	Polyamide	O-Ring:	NBR
Contacts:	Copper Alloy with Gold Plating	Temperature:	-40°C to 105°C (-40°F to +221°F)