REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	3/15/2006	

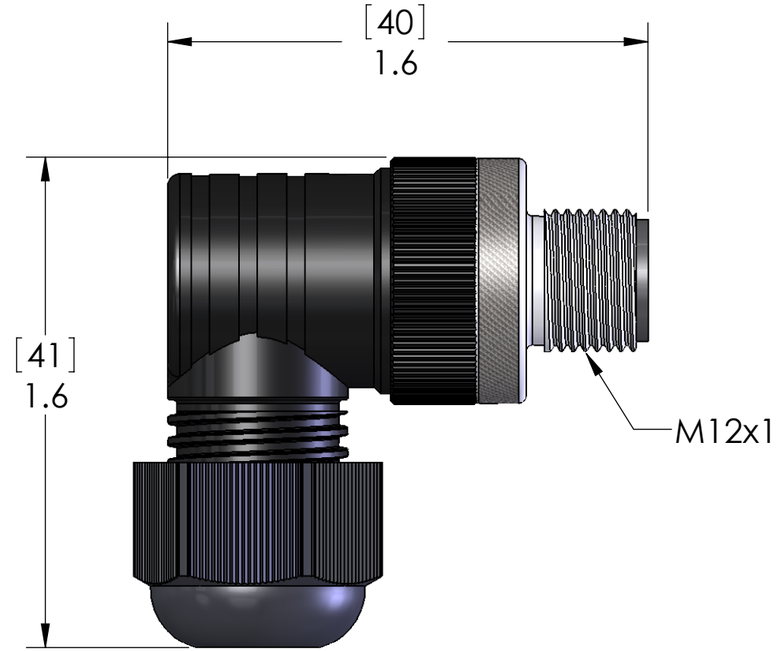

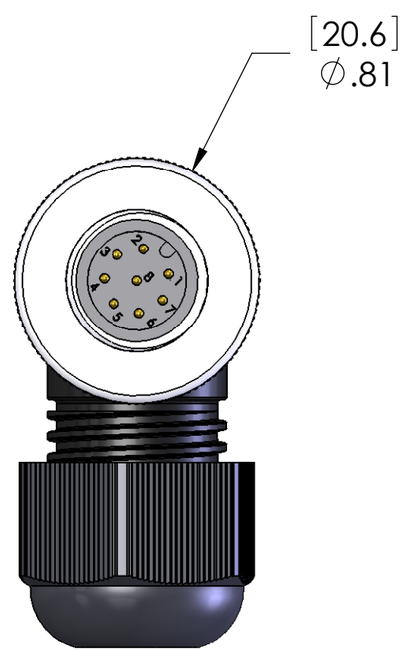

CONNECTION MADE VIA SCREW TERMINALS
KEYWAY POSITIONABLE IN 90° INCREMENTS

SPECIFICATIONS:	
RATED CURRENT (A)	2A
RATED VOLTAGE (V)	60V
MAX WIRE SIZE:	20AWG [0.5sqmm]
MIN WIRE SIZE:	24AWG [0.25sqmm]
CABLE GRIP RANGE:	.157 - .315" [4 - 8mm]
TEMP RATING:	-40°F - 185°F [-40°C - 85°C]
SEAL:	IP67

MATERIALS	
BODY:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
COUPLING:	NICKEL PLATED BRASS

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME
DRAWN	BEM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	

COMMENTS:

MENCOM CORPORATION

TITLE:

5 POLE MALE FW

SIZE	DWG. NO.	REV
B	MDC-8MP-FW09-R	A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1