
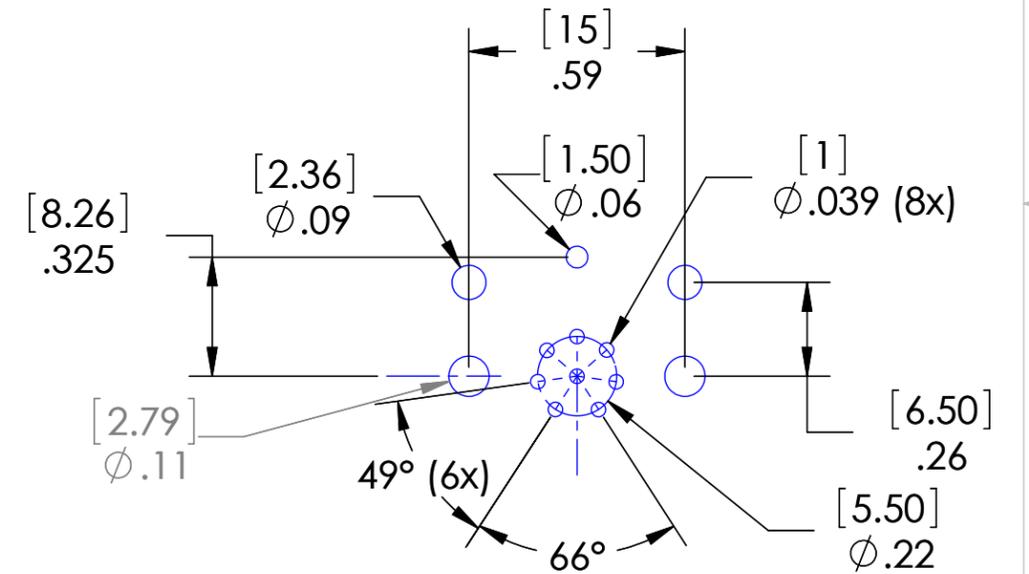
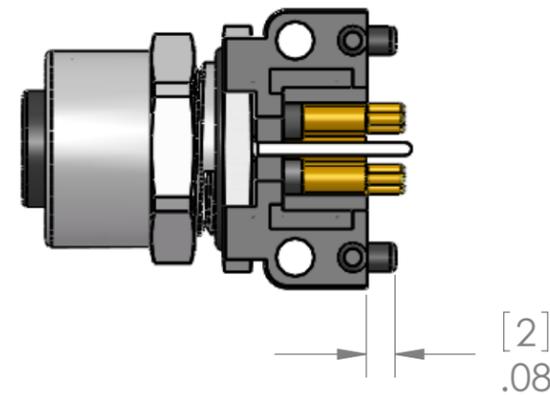
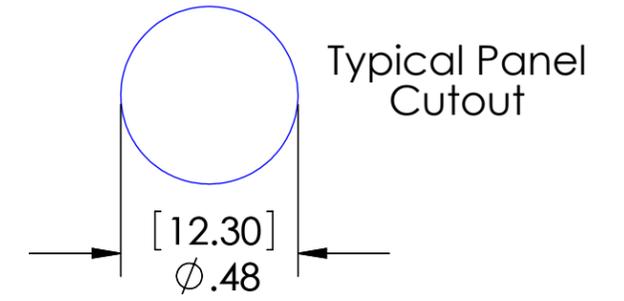
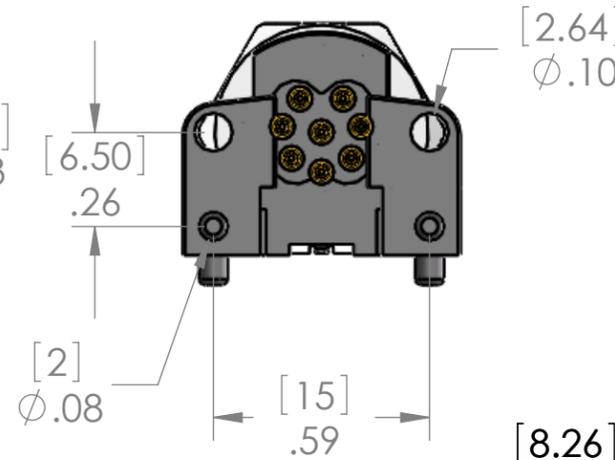
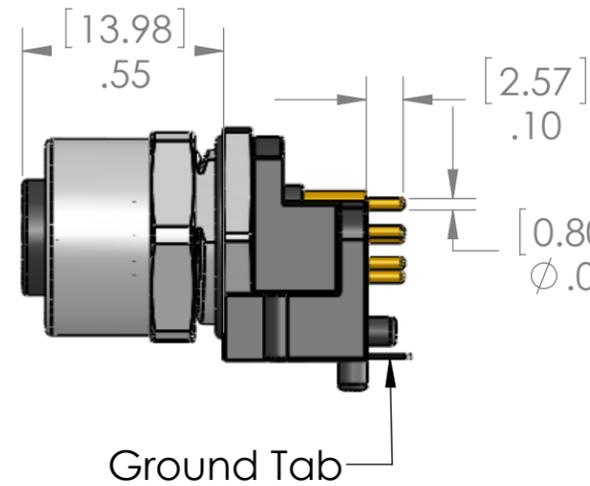


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	Redrawn in SW	5/19/2014	JJH

Recommended MAX Panel Thickness: 0.12" [3mm]  
 Recommended PCB thickness: 0.63" [1.6mm]

M12x1.0  
 Female  
 Thread

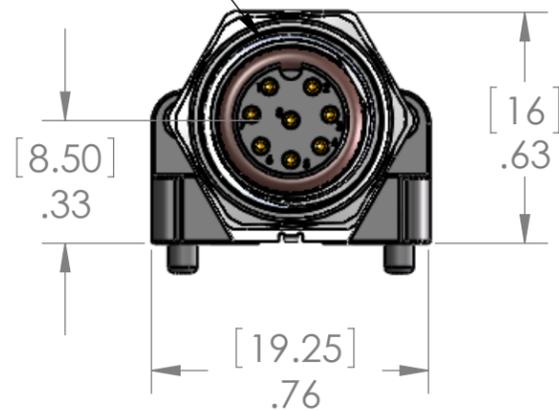

MATERIALS:	
BODY:	POLYAMIDE
METAL HDWR:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RING:	BUNA-N
GROUND TAB:	NICKEL PLATED BRASS
RATINGS:	
VOLTAGE:	60V
AMPERAGE:	2A

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		MENCOM CORPORATION
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN	BEM	
		CHECKED		TITLE:
		ENG APPR.		8 Pole Micro-DC pcb mt fem. w/grnd tab (A - Coded)
		MFG APPR.		SIZE DWG. NO. REV
		Q.A.		<b>B</b> MDCM-8FR-PCB <b>A</b>
		COMMENTS:		SCALE: 2:1 WEIGHT: SHEET 1 OF 1
MATERIAL				
FINISH				
DO NOT SCALE DRAWING				