

WIRING		
MALE		FEMALE
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAW IN SW	7/14/2009	

D

D

C

C


B

B



A

A

M12x1 Female



[15]
.6

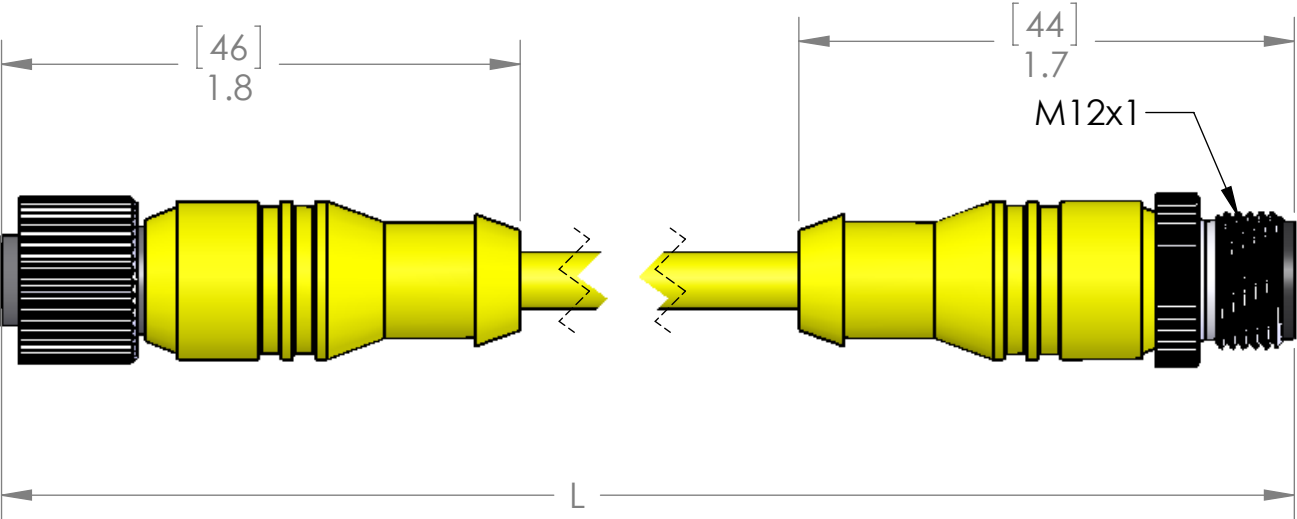

[15]
Ø.6

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	22/4 YELLOW TPE JACKET
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

P/N	L	STD?
MDCW-4MFP-0.5M	0.5M	YES
MDCW-4MFP-1M	1M	YES
MDCW-4MFP-2M	2M	YES
MDCW-4MFP-3M	3M	YES
MDCW-4MFP-4M	4M	YES
MDCW-4MFP-5M	5M	YES
MDCW-4MFP-6M	6M	NO
MDCW-4MFP-8M	8M	NO
MDCW-4MFP-10M	10M	YES
MDCW-4MFP-15M	15M	YES
MDCW-4MFP-20M	20M	NO
MDCW-4MFP-30M	30M	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES