WIRING		
MALE		FEMALE
PIN #		PIN #
1	-------	1
2	-------	2
3	-------	3
4	-------	4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	5/29/2014	RSC

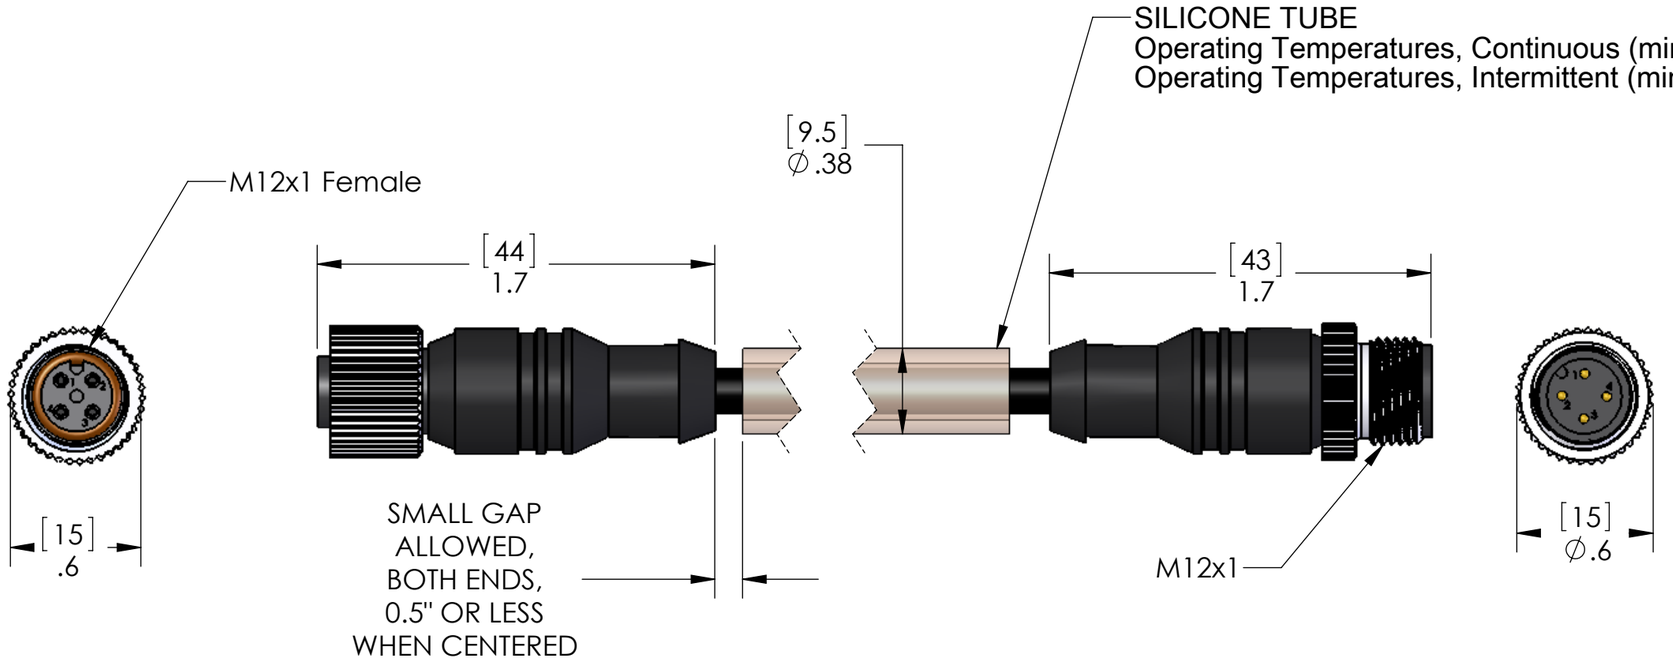

TABLE A	
P/N	L
MDCWF-4MFP-0.5M-A50	19" [0.5M]
MDCWF-4MFP-1M-A50	40" [1M]
MDCWF-4MFP-1.5M-A50	59" [1.5M]
MDCWF-4MFP-2M-A50	79" [2M]
MDCWF-4MFP-3M-A50	118" [3M]
MDCWF-4MFP-4M-A50	157" [4M]

** Longer length runs will require a larger OD silicone tube. Please consult factory

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	22/5 CONTINUOUS FLEX BLACK TPE JACKET. 20MM FLEXES, MIN BEND RADIUS IS 10x CABLE O.D.
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
TUBING	SILICONE TUBE NATURAL 50A DURAMOTER

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME
DRAWN	JJH
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

4 POL M-F EXT, TPE, ARMRD

SIZE	DWG. NO.	REV
B	MDCWF-4MFP-ZZ-A50	A

SCALE: 3:2 | WEIGHT: | SHEET 1 OF 1