

KombiSIGN 71 / Terminal Element
USB-Terminal element RM 5VDC BK



| | |
|-----------|--------------|
| Part No.: | 640.840.00 |
| Series: | KombiSIGN 71 |



MECHANICAL DATA

| | |
|-----------------------------|---------------|
| Length | 70 mm |
| Width | 70 mm |
| Height | 41 mm |
| Diameter | 70 mm |
| Materials | PA-GF |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | USB |
| Cable entry | Through hole |
| Cable entry maximum | d = 14 mm |
| Type of fixing | Tube mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 185 g |
| Product weight | 141 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 5V (USB) |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 0% |
| Rated operational voltage | 5 VDC |
| Rated operational current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Request to external PSU | SELV/PELV |
| Current carrying capacity | 90mA |
| connectivity | USB |

OPTICAL DATA

| | |
|----------------------|------------------|
| Service life optical | 50,000 h maximum |
|----------------------|------------------|

APPROVAL DATA

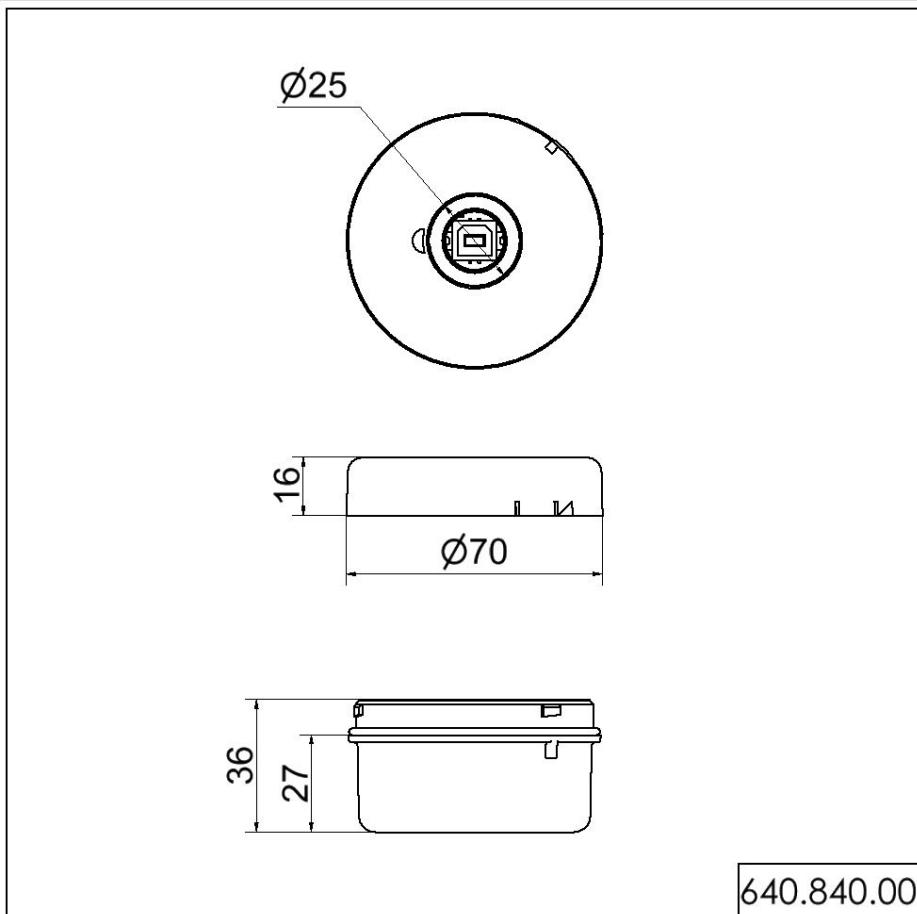
| | |
|-----------------------------|-----|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with RED directive | No |
| Conform with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | No |
| Conforms with FCC | No |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Terminal Element

USB-Terminal element RM 5VDC BK

| | |
|---------------------------|-----|
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with GL | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.