

Product data sheet

Characteristics

10S1F

TRANSFORMER DRY 10KVA

240X480V-120/240V

Product availability : Stock - Normally stocked in distribution facility



Price* : 2,712.00 USD



Main

Product or component type	Dry Sealed Transformer
Primary to Secondary Voltage	240 x 480 V 120/240 V
Full Capacity Taps	0

Complementary

Enclosure Code	13B
Phase	1 phase
Power Rating	10 kVA
Temperature rise	115 °C
Height	14.75 in (374.65 mm)
Width	9.75 in (247.65 mm)
Depth	11.75 in (298.45 mm)
Enclosure mounting	Wall mounted
Net Weight	165 lb(US) (74.84 kg) 164.99 lb(US) (74.84 kg)
Enclosure material	Painted sheet steel

Environment

Enclosure Type	NEMA 3R
Insulation temperature	356 °F (180 °C)
Product certifications	CULus CSA UL Listed

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ordering and shipping details

Category	16277 - RESIN LVGP XFMR
Discount Schedule	PE2
GTIN	00785901359562
Nbr. of units in pkg.	1
Package weight(Lbs)	165 lb(US) (74.84 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Package 1 Height	14.10 in (35.814 cm)
Package 1 width	14.00 in (35.560 cm)
Package 1 Length	10.70 in (27.178 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
RECh Regulation	RECh Declaration
RECh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
PVC free	Yes




Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

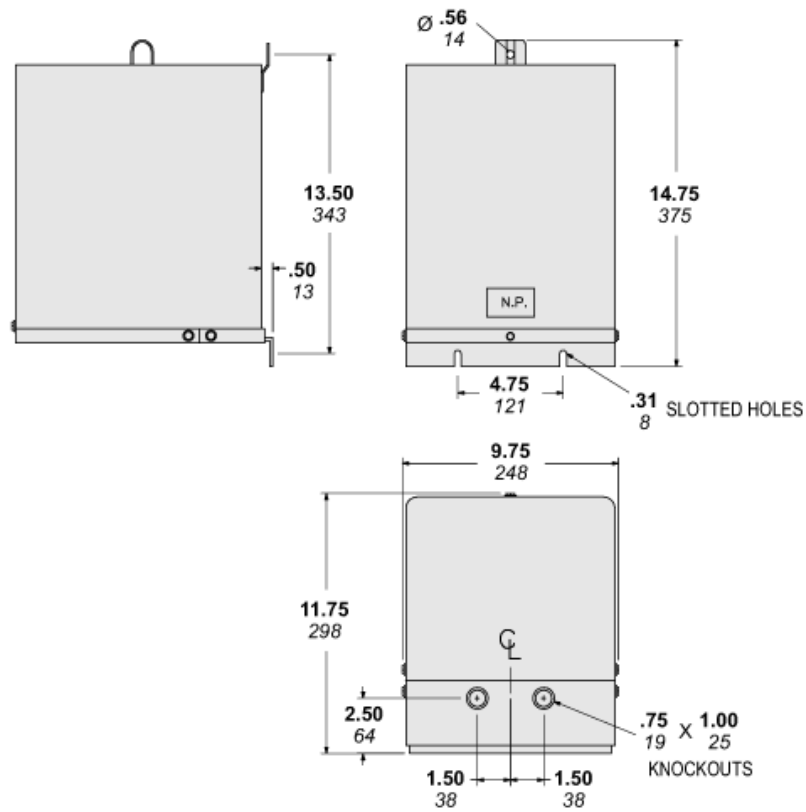

Wiring

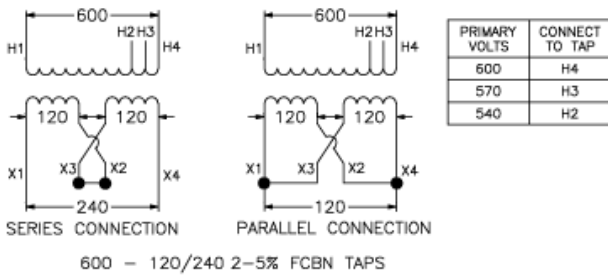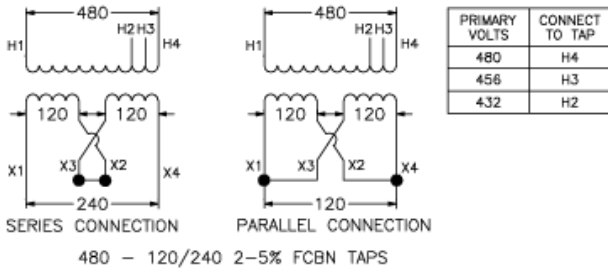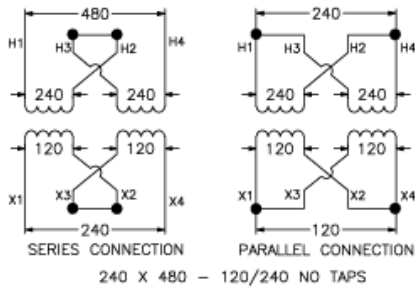

KVA	CATALOG NUMBERS			TEMP. RISE	GUAR. SOUND LEVEL	WGT LBS
	PRIMARY					
	240X480	480	600			
5	5S1F	5S40F	5S4F	115°C	40 DB	115
7.5	7S1F	7S40F	7S4F	115°C	40 DB	135
10	10S1F	10S40F	10S4F	115°C	45 DB	165