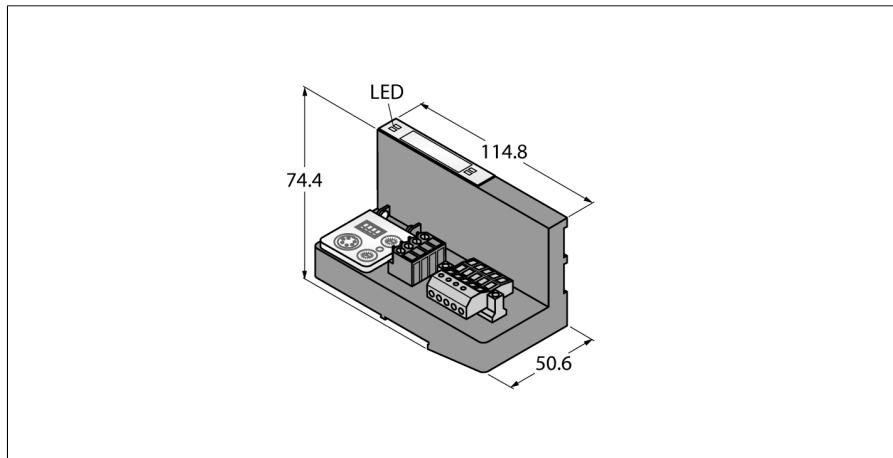


Gateway for the BL20 I/O System

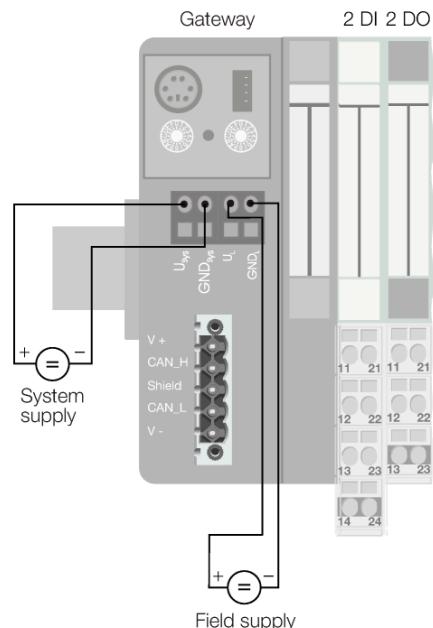
Interface for DeviceNet, incl. power supply

BL20-GWBR-DNET



Type designation	BL20-GWBR-DNET
Ident-No.	6827168
Supply voltage	24 VDC
System power supply	24 VDC / 5 VDC
Field supply	24 VDC
Admissible range	18...30 VDC
Nominal current from module bus	≤ 250 mA
Max. field supply current	10 A
Max. system supply current	1.2 A
Voltage supply connection	Screw terminals
Fieldbus transmission rate	125/250/500 kbps
Fieldbus addressing	2 rotary switches
Fieldbus address range	0...63
Fieldbus connection technology	Open style connector
Fieldbus termination	External
Max. number of I/O modules	74
Service interface	PS/2 socket
Dimensions (W x L x H)	50.6 x 114.8 x 74.4mm
Approvals	CE, cULus, zone 2, Class I, Div. 2
Operating temperature	0 to +55 °C
Storage temperature	-25...+85 °C
Relative humidity	5 to 95% (internal), Level RH-2, no condensation (at 45 °C storage)
Vibration test	acc. to EN 61131
Shock test	acc. to IEC 68-2-27
Drop and topple	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Electromagnetic compatibility	acc. to EN 50,082-2
Protection class	IP20
Included in delivery	2 x end brackets BL20-WEW-35/2-SW, 1 x end plate BL20-ABPL, 1 x open style connector

Field/System Supply



Functional principle

BL20 gateways are the head component of a BL20 station. They are designed to interface the modular fieldbus nodes to the higher level fieldbus (PROFIBUS-DP, DeviceNet, CANopen, Ethernet).

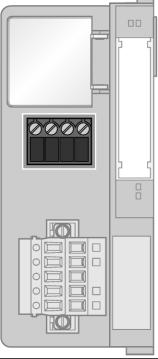
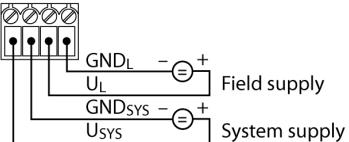
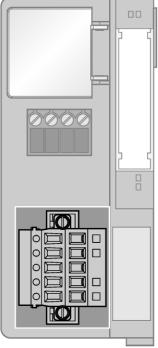

All BL20 electronic modules communicate over the internal module bus, the data of which is transferred to the fieldbus via the gateway, so that all I/O modules can be configured independently of the bus system.

Gateway for the BL20 I/O System

Interface for DeviceNet, incl. power supply

BL20-GWBR-DNET

Anschlussübersicht

	<p>Power Supply The U_{sys} system supply feeds power to the gateway and the I/O modules. The U_L field supply feeds power to the sensors and actuators.</p>	<p>Pin Assignment</p>  <table border="1"> <tr> <td>GND_L</td> <td>-</td> <td>+</td> <td>Field supply</td> </tr> <tr> <td>U_L</td> <td>-</td> <td>+</td> <td>System supply</td> </tr> <tr> <td>GND_{SYS}</td> <td>-</td> <td>+</td> <td></td> </tr> <tr> <td>U_{SYS}</td> <td>-</td> <td>+</td> <td></td> </tr> </table>	GND _L	-	+	Field supply	U _L	-	+	System supply	GND _{SYS}	-	+		U _{SYS}	-	+	
GND _L	-	+	Field supply															
U _L	-	+	System supply															
GND _{SYS}	-	+																
U _{SYS}	-	+																
	<p>DeviceNet™ Fieldbus cable (example): CBC5-572-2M (ident no. 6606065) or RKC5701-5M (ident no. 6931035)</p>	<p>Pin Assignment</p>  <table border="1"> <tr> <td>V+</td> <td>CAN_H</td> <td>shield</td> <td>CAN_L</td> <td>V-</td> </tr> </table>	V+	CAN_H	shield	CAN_L	V-											
V+	CAN_H	shield	CAN_L	V-														