


# BIM-NST-AP6X-H1141/S34 Magnetic Field Sensor - for pneumatic cylinders (magnetic-field immune)

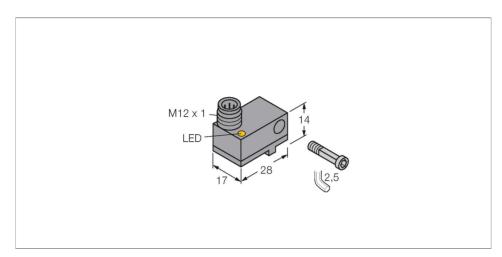


# Technical data


| Туре                                      | BIM-NST-AP6X-H1141/S34                                     |
|---|--|
| Ident. no.                                | 4685401  |
| Special version                           | S34 corresponds to:<br>Weld-field immune proximity sensors |
| Pass speed                                | ≤ 1 m/s  |
| Repeatability                             | ≤ ± 0.1 mm   |
| Temperature drift                         | ≤ 0.1 mm   |
| Hysteresis                                | ≤ 1 mm   |
| Ambient temperature                       | -25+70 °C  |
| Operating voltage                         | 1030 VDC   |
| Residual ripple                           | ≤ 10 % U <sub>ss</sub>                                     |
| DC rated operational current              | ≤ 200 mA   |
| No-load current                           | ≤ 15 mA  |
| Residual current                          | ≤ 0.1 mA   |
| Isolation test voltage                    | ≤ 0.5 kV   |
| Short-circuit protection                  | yes / Cyclic   |
| Voltage drop at I <sub>e</sub>            | ≤ 1.8 V  |
| Wire breakage/Reverse polarity protection | yes / Complete   |
| Output function                           | 3-wire, NO contact, PNP                                    |
| Switching frequency                       | 0.015 kHz  |
| Design                                    | Rectangular, NST   |
| Dimensions                                | 28 x 17 x 14 mm  |
| Housing material                          | Plastic, PA12-GF30   |
|   |  |

## **Features**

- Plastic, PA12-GF30
- Magnetic-inductive sensor
- ■Weld resistant to AC fields of 50...60 Hz
- ■DC 3-wire, 10...30 VDC
- ■NO contact, PNP output
- Male connector, M12 x 1

# Wiring diagram





Functional principle


Magnetic field sensors are activated by magnetic fields and are used, in particular, for the detection of the piston position in pneumatic cylinders. As magnetic fields can permeate non-magnetizable metals, they detect a permanent magnet attached to the piston through the aluminium cylinder wall.

Weld-field immune permaprox sensors "freeze" the switching status when detecting a magnetic AC field (50...60 Hz). In this way, false switching operations are prevented during the welding process. When the AC field disappears, the sensors resume standard operation.

# Technical data


| Active area material               | Plastic, PA12-GF30                                   |
|------------------------------------|--|
| Electrical connection              | Connector, M12 × 1                                   |
| Vibration resistance               | 55 Hz (1 mm)   |
| Shock resistance                   | 30 g (11 ms)   |
| Protection class                   | IP67   |
| MTTF                               | 2283 years acc. to SN 29500 (Ed. 99) 40 °C           |
| Mounting on the following profiles |  |
| Cylindrical design                 | I I ###  |
| Switching state                    | LED, Yellow  |
| Included in delivery               | 1 x screw M3x20, 1 x tension bolt, 1 x spring washer |

# Accessories




#### 6970504

Mounting bracket for mounting magnetic field sensors on dovetail groove cylinders or T-groove cylinders; clamping width: 5.2... 13.5 mm; material: Anodized aluminum




#### 6970503

Mounting bracket for mounting magnetic field sensors on SMC cylinders; clamping width 4 mm; material: Anodized aluminum




### 6970401

Mounting bracket for mounting magnetic field sensors on profile cylinders with external dovetail guide; for all cylinder diameters, material: Anodized aluminum



### 6970402

Mounting bracket for mounting magnetic field sensors on profile cylinders (IMI Norgren); cylinder diameter: 32...100 mm; material: Anodized aluminum



#### A3106

Mounting bracket for mounting magnetic field sensors on SMC cylinders; clamping width 4 mm; material: Anodized aluminum