


B2N10H-Q20L60-2LU3-H1151



Inclinometer

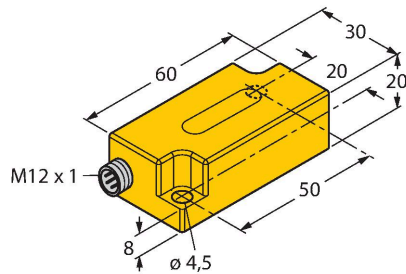

Features

- Plastic, PC
- Zero point calibration $\pm 5^\circ$
- Two analog outputs
- M12 x 1 male connector

Wiring diagram



Functional principle




Inclination is determined by a wear-free semiconducting sensor element.

Technical data

Type	B2N10H-Q20L60-2LU3-H1151
Ident. no.	1534006
Measuring range	$-10 \dots 10^\circ$
Measuring range x-axis	$-10 \dots 10^\circ$
Measuring range y-axis	$-10 \dots 10^\circ$
Number of measuring axes	2
Repeatability	$\leq 0.2\%$ of measuring range $ A - B $
Linearity deviation	$\leq 1\%$
Temperature drift	$\leq \pm 0.05\% / K$
Resolution	$\leq 0.04^\circ$
Ambient temperature	$-30 \dots +70^\circ C$
Operating voltage	$10 \dots 30\text{ VDC}$
Isolation test voltage	$\leq 0.5\text{ kV}$
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	no / yes
Surge protection	$-48 \dots 48\text{ VDC}$ [$U_{b\text{ max.}}$]
Output function	5-pin, Analog output
Voltage output	$0.1 \dots 4.9\text{ V}$
Load resistance voltage output	$\geq 40\text{ k}\Omega$
Response time	0.1 s
	time for the output signal to achieve 90% full scale if the angle changes from -10° to $+10^\circ$
Current consumption	50 mA


Technical data

Design	Rectangular, Q20L60
Dimensions	60 x 30 x 20 mm
Housing material	Plastic, PC
Electrical connection	Connector, M12 × 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68 / IP69K
MTTF	203 years acc. to SN 29500 (Ed. 99) 40 °C

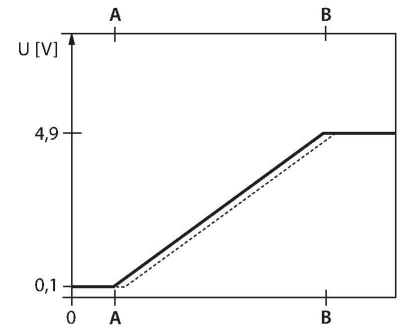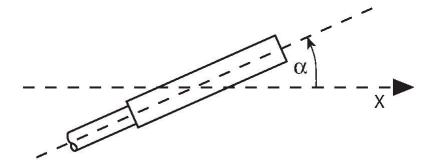

Mounting instructions

Mounting instructions/Description

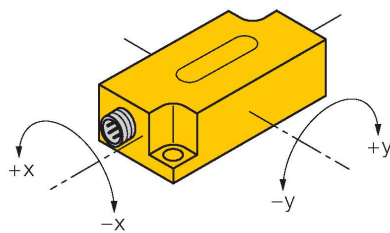

Teaching

The zero point can be adjusted with teach adapter TX1-Q20L60.

Teach-GND is pressed for approx. 1 s to do this. The outputs are switched to 5 V as confirmation.


Teach-GND is pressed for 6 s to reset the axis zero points. The outputs are switched to 0 V as confirmation.

Once the teach button is released, the sensor returns to normal operation.

Accessories

GUARD-Q20L60

A9684



Protective housing for Q20L60 inclinometers for protecting against mechanical impact; material: Stainless steel