


B2N10H-Q20L60-2LU5-H1151 Inclinometer

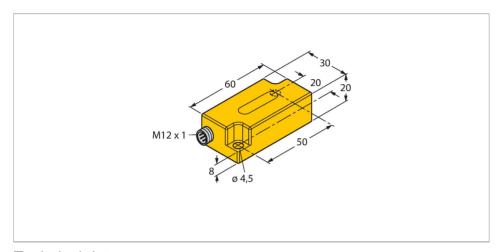


Technical data


Туре	B2N10H-Q20L60-2LU5-H1151
Ident. no.	1534009
Measuring range	-1010 °
Measuring range x-axis	-1010 °
Measuring range y-axis	-1010 °
Number of measuring axes	2
Repeatability	≤ 0.2 % of measuring range A - B
Linearity deviation	≤ 1 %
Temperature drift	≤ ± 0.05 % / K
Resolution	≤ 0.04 °
Absolute fault	1 ° [at 25 °C]
Ambient temperature	-30+70 °C
Operating voltage	4.755.25 VDC
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	no / yes
Surge protection	-1616 VDC [U _{b max.}]
Output function	5-pin, Analog output
Ratiometric output voltage	298 % U₅
Outout impedance	99105 Ω
Response time	0.1 s
	time for the output signal to achieve 90% full scale if the angle changes from -10° to +10°
Current consumption	50 mA

Features

- Plastic, PC
- ■Zero point calibration +/- 5°
- ■Two analog outputs
- ■M12 x 1 male connector

Wiring diagram






Functional principle

Inclination is determined by a wear-free semiconducting sensor element.


Technical data

Design	Rectangular, Q20L60
Dimensions	60 x 30 x 20 mm
Housing material	Plastic, PC
Electrical connection	Connector, M12 × 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68 / IP69K
MTTF	203 years acc. to SN 29500 (Ed. 99) 40 °C

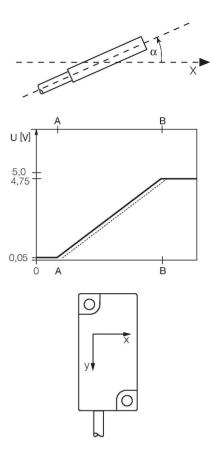

Mounting instructions

Mounting instructions/Description



Accessories

GUARD-Q20L60

A9684

Protective housing for Q20L60 inclinometers for protecting against mechanical impact; material: Stainless steel

Teaching

The zero point can be adjusted with teach adapter TX1-Q20L60.

Teach-GND is pressed for approx. 1 s to do this. The outputs are switched to 5 V as confirmation.

Teach-GND is pressed for 6 s to reset the axis zero points. The outputs are switched to 0 V as confirmation.

Once the teach button is released, the sensor returns to normal operation.