

Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC RD





MECHANICAL DATA	
Height	107 mm
Diameter	38 mm
Materials	PC
Dome colour	Red
Housing colour	Black
Protection category	IP65
Connection	M12 plug 5-pole
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 9 mm
Tension relief	Pull-out protection
Type of fixing	Built-in mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	100 g
Product weight	60 g

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	55 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	

OPTICAL DATA	
Light source	LED
Light colour	Red
Optical signal image	Permanent
Service life optical	50,000 h maximum

ACUSTICAL DATA	
Volume (max) at 1m distance	85,0 dB (A)
Acoustic signal image	Pulse tone
Audio frequency	3000 Hz

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC RD


Acoustic service life	5,000 h minimum	
APPROVAL DATA		
Conforms with CE	Yes	
WEEE	Yes	
Conforms with RED directive	No	
Conform with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	CULus	
UL Type Rating	Type 12 Type 4X	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with GL	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC RD

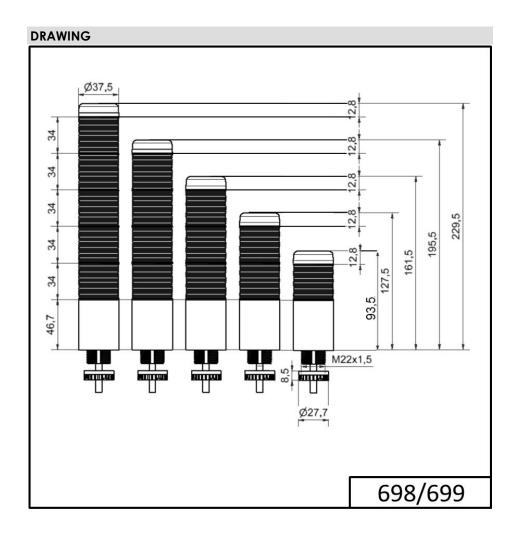

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.