### **DATASHEET - P1-25/EA/SVB**



Main switch, P1, 25 A, flush mounting, 3 pole, Emergency switching off function, With red rotary handle and yellow locking ring, Lockable in the 0 (Off) position



P1-25/EA/SVB Part no. Catalog No. 041097

**EL-Nummer** (Norway)

1456105

Delivery program			
Product range			Main switch maintenance switch Repair switch
Part group reference			P1
Stop Function			Emergency switching off function
			With red rotary handle and yellow locking ring
Information about equipment supplied			Auxiliary contact or neutral conductor fitted by user.
Number of poles			3 pole
Auxiliary contacts			
r		N/0	0
<b>7</b>		N/C	0
Locking facility			Lockable in the 0 (Off) position
Degree of Protection			Front IP65
Design			flush mounting
Contact sequence			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
Function			OFF O
Motor rating AC-23A, 50 - 60 Hz			
400 V	Р	kW	11
Rated uninterrupted current	I <sub>u</sub>	Α	25
Note on rated uninterrupted current !u	-		Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.

# **Technical data**

deliefal	
Standards	IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3 NEMA12
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature	

Open		°C	-25 - +50
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	U <sub>imp</sub>	V AC	6000
Mechanical shock resistance	r	g	15
Mounting position			As required
Contacts			
Mechanical variables			
Number of poles			3 pole
Auxiliary contacts			
		N/0	0
		N/C	0
Electrical characteristics			
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current	l <sub>u</sub>	Α	25
Note on rated uninterrupted current !u			Rated uninterrupted current $\mathbf{I}_{\mathbf{u}}$ is specified for max. cross-section.
Load rating with intermittent operation, class 12			
AB 25 % DF		x I <sub>e</sub>	2
AB 40 % DF		x I <sub>e</sub>	1.6
AB 60 % DF		x I <sub>e</sub>	1.3
Short-circuit rating			
Fuse		A gG/gL	25
Rated short-time withstand current (1 s current)	I <sub>cw</sub>	A <sub>rms</sub>	640
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	Iq	kA	50
Switching capacity	1		
cos φ rated making capacity as per IEC 60947-3		Α	240
Rated breaking capacity $\cos \phi$ to IEC 60947-3		Α	
230 V		Α	190
400/415 V		Α	150
500 V		Α	170
690 V		Α	150
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at I <sub>e</sub>		W	1.1
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	> 0.3
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	Р	kW	
220 V 230 V	Р	kW	5.5
400 V 415 V	Р	kW	7.5
500 V	P	kW	7.5
690 V	P	kW	7.5
Rated operational current motor load switch			
230 V	I <sub>e</sub>	Α	19.6
400V 415 V	I <sub>e</sub>	Α	15.2
500 V	I <sub>e</sub>	Α	12.1
690 V	I <sub>e</sub>	Α	8.8
AC-23A			
Motor rating AC-23A, 50 - 60 Hz	P	kW	
230 V	P	kW	5.5
400 V 415 V	P	kW	11
500 V	P	kW	11

Rated operational current motor load switch   P
400 V 415 V   Ie
Soul
690 V IL BENT STATE OF THE METHOD STATE OF THE
DC DC-1, Load-break switches L/R = 1 ms  Rated operational current  Voltage per contact pair in series  DC-23A, motor load switch L/R = 15 ms  24 V  Rated operational current  Ie A 25  Contacts  Quantity  Contacts  Quantity  Contacts  Quantity  Contacts  Ie A 25  Contacts  Quantity  Contacts  Quantity  Contacts  Rated operational current  Ie A 25  Quantity  Contacts  Quantity  Contacts  Quantity  Contacts  Quantity  Contacts  Quantity  Fault probability  HF Contacts  Contacts  Contacts  Contacts  Contacts  Quantity  Contacts  Contacts  Rated operational current  Fault probability  HF Contacts  Conta
DC-1, Load-break switches L/R = 1 ms Rated operational current Voltage per contact pair in series  DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Le A 25 Contacts Quantity Rated operational current Le A 25 Contacts Quantity 2 Rated operational current Le A 25 Contacts Quantity 2 Rated operational current Le A 25 Contacts Quantity 2 Rated operational current Le A 25 Contacts Quantity 2 Rated operational current Le A 25 Contacts Quantity 2 Rated operational current Le A 25 Contacts Quantity 2 Rated operational current Le A 25 Contacts Quantity 2 Rated operational current Le A 25 Contacts Quantity 2 Rated operational current Le A 12 Quantity 3 Control circuit reliability at 24 V DC, 10 mA
Rated operational current  Voltage per contact pair in series  DC-23A, motor load switch L/R = 15 ms  24 V  Rated operational current  Le A 25  Contacts  Quantity  Rated operational current  Le A 12  Contacts  Contacts  Quantity  Rated operational current  Le A 12  Contacts  Contacts  Contacts  Rated operational current  Le A 12  Contacts  Contacts  Contacts  Rated operational current  Le A 12  Contacts  Contacts  Contacts  Rated operational current  Le A 12  Contacts  Cont
Voltage per contact pair in series  DC-23A, motor load switch L/R = 15 ms  24 V  Rated operational current  48 V  Rated operational current  Ie A 25  Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity  2  Rated operational current  Ie A 25  Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity  A 48  Contacts  Contacts  Quantity  A 48  Contacts  Contacts  A 48  Contacts  Contacts  A 48  Contacts  A 40  Contacts  Contact
DC-23A, motor load switch L/R = 15 ms  24 V  Rated operational current  48 V  Rated operational current  Ie A 25  Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity 2  60 V  Rated operational current  Ie A 25  Contacts  Quantity 2  12 V  Rated operational current  Ie A 25  Contacts  Quantity 2  Contacts  Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault probability  Fault probability  Fault probability  Fault probability  Fault probability HF < 10 <sup>-5</sup> ,<1 failure in 100,000 switching operations
24 V Rated operational current    Contacts   Quantity   Rated operational current   Contacts   Conta
Rated operational current  Contacts Quantity Rated operational current  Rated operational current  Contacts Quantity Quantity Quantity Rated operational current  Ie A 25  Contacts Quantity Rated operational current  Ie A 25  Contacts Quantity Quantity Quantity Quantity Quantity Quantity Rated operational current  Ie A 25  Contacts Quantity Quantity A 12  Contacts Quantity Rated operational current Particular operational current Particular operations  Control circuit reliability at 24 V DC, 10 mA  Fault probability Pr
Contacts Quantity  Rated operational current  Ie A 25  Contacts Quantity  Rated operational current Ie A 25  Contacts Quantity  Rated operational current Ie A 25  Contacts Quantity 2  120 V  Rated operational current Ie A 12  Contacts Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault probability  HF Contacts Rated operations
Rated operational current    Part of the probability of the probabilit
Rated operational current  Contacts  Quantity  Rated operational current  Rated operational current  Ie A 25  Contacts  Quantity  Quantity  Quantity  Contacts  Rated operational current  Fault probability  HF  Control circuit reliability at 24 V DC, 10 mA
Contacts  Quantity  Rated operational current  Rated operational current  Ie  Quantity  Quantity  120 V  Rated operational current  Ie  A  12  Contacts  Quantity  The standard operational current  Ie  A  12  Contacts  Quantity  The standard operational current  Ie  A  10  Contacts  Control circuit reliability at 24 V DC, 10 mA  Fault probability  Fault probability  Fault probability  Fault probability  Fault probability
Rated operational current  Rated operational current  Contacts  Rated operational current  Fault probability  Rated operational current  Very service of the contacts  Control circuit reliability at 24 V DC, 10 mA  Rated operational current  Very service of the contacts  Rated operational current  Very service of the contacts  Very service of the contacts  Control circuit reliability at 24 V DC, 10 mA  Rated operational current  Very service of the contacts  Very service of the contacts  Very service of the contact of the cont
Rated operational current  Contacts  Quantity  120 V  Rated operational current  Rated operational current  Ie A 12  Contacts  Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Rated operational current  Fault probability  HF  Control circuit reliability at 24 V DC, 10 mA  A 25  Quantity 2  Control circuit reliability at 24 V DC, 10 mA  A 25  Quantity 2  Control circuit reliability at 24 V DC, 10 mA
Contacts  120 V  Rated operational current  Contacts  Contacts  Control circuit reliability at 24 V DC, 10 mA  Quantity  A  12  Quantity  Quantity  3  Control circuit reliability at 24 V DC, 10 mA  Control circuit reliability at 24 V DC, 10 mA  Control circuit reliability  Control circuit reliability at 24 V DC, 10 mA  Control circuit reliability  Control circuit reliability at 24 V DC, 10 mA  Control circuit reliability  Control circuit reliability at 24 V DC, 10 mA  Control circuit reliability  Control
120 V Rated operational current I <sub>e</sub> A 12 Contacts Quantity Control circuit reliability at 24 V DC, 10 mA Fault probability HF control circuit reliability at 24 V DC, 10 mA  Result probability Fault probability
Rated operational current  Contacts  Control circuit reliability at 24 V DC, 10 mA  Rated operational current  Ue  Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault probability  HF  V10 <sup>-5</sup> ,<1 failure in 100,000 switching operations
Control circuit reliability at 24 V DC, 10 mA  Fault probability  Fault probability  Fault probability  HF
Control circuit reliability at 24 V DC, 10 mA Fault $_{\text{probability}}$ Fault $_{\text{probability}}$ H <sub>F</sub> $< 10^{-5}, < 1 \text{ failure in } 100,000 \text{ switching operations}$
probability
Terminal capacities
Solid or stranded $mm^2 \qquad 1 \times (1,5-6) \\ 2 \times (1,5-6)$
Flexible with ferrules to DIN 46228 $mm^2 = \frac{1 \times (1 - 4)}{2 \times (1 - 4)}$
Terminal screw M4
Tightening torque for terminal screw Nm 1.6
Technical safety parameters:
Notes B10 <sub>d</sub> values as per EN ISO 13849-1, table C1  Rating data for approved types  Contacts
Rated operational voltage U <sub>e</sub> V AC 600
Rated uninterrupted current max.  Main conducting paths
General use A 20
Auxiliary contacts
General Use I <sub>U</sub> A 10
Pilot Duty A 600
P 600
Switching capacity
Maximum motor rating
Single-phase Single-phase
120 V AC HP 1
200 V AC HP 2
240 V AC HP 3
Three-phase
200 V AC HP 3
240 V AC HP 5
480 V AC HP 10
600 V AC HP 15
Short Circuit Current Rating SCCR
Basic Rating kA 5

max. Fuse	Α	110
High fault rating	kA	10
max. Fuse	Α	50, Class J
Terminal capacity		
Solid or flexible conductor with ferrule	AWG	14 - 8
Terminal screw		M4
Tightening torque	lb-in	14.1

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	25
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	1.1
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:specifications}$
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. $\label{eq:continuous}$

#### **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Switch disconnector (EC000216)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnector (ecl@ss10.0.1-27-37-14-03 [AKF060013])


[AKF060013])	
Version as main switch	Yes
Version as maintenance-/service switch	Yes
Version as safety switch	No
Version as emergency stop installation	Yes
Version as reversing switch	No
Number of switches	1


May noted an eretion veltors III AC	,	V	000
Max. rated operation voltage Ue AC			690
Rated operating voltage		V	690 - 690
Rated permanent current lu	,	A	25
Rated permanent current at AC-23, 400 V	,	A	25
Rated permanent current at AC-21, 400 V	1	Α	25
Rated operation power at AC-3, 400 V	ŀ	kW	7.5
Rated short-time withstand current lcw	ŀ	kA	0.64
Rated operation power at AC-23, 400 V	ŀ	kW	13
Switching power at 400 V	ŀ	kW	13
Conditioned rated short-circuit current Iq	ŀ	kA	80
Number of poles			3
Number of auxiliary contacts as normally closed contact			0
Number of auxiliary contacts as normally open contact			0
Number of auxiliary contacts as change-over contact			0
Motor drive optional			No
Motor drive integrated			No
Voltage release optional			No
Device construction			Built-in device fixed built-in technique
Suitable for ground mounting			No
Suitable for front mounting 4-hole			Yes
Suitable for front mounting centre			No
Suitable for distribution board installation			No
Suitable for intermediate mounting			No
Colour control element			Red
Type of control element			Door coupling rotary drive
Interlockable			Yes
Type of electrical connection of main circuit			Screw connection
Degree of protection (IP), front side			IP65
Degree of protection (NEMA)			12


## Approvals

• •	
Product Standards	UL 60947-4-1;CSA - C22.2 No. 60947-4-1-14; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Suitable for	Branch circuits, suitable as motor disconnect
Degree of Protection	IEC: IP65; UL/CSA Type 1, 12

## **Dimensions**

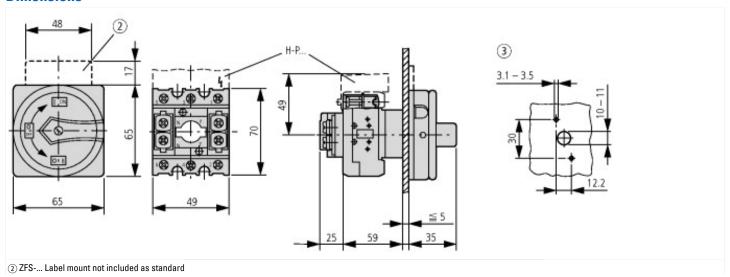





d = 4 - 8 mm  $b + d \le 47 \text{ mm}$  d = 0.16 - 0.31 d = 0.85

≦3 padlocks

#### **Additional product information (links)**

, , , , , , , , , , , , , , , , , , , ,	
Technical overview cam switch, switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.2
System overview cam switch T	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.4
System overview switch-disconnector P	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.6
Key to part numbers Cam switch	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8
Key to part numbers Switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8
Switches for ATEX	http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html