

Product data sheet

Characteristics


8903LO80V04

Contacteur, Type L, multipole lighting, electrically held, 30A, 8 pole, 600 V, 277 VAC 60 Hz coil, open style

Product availability : Stock - Normally stocked in distribution facility



Price* : 1,017.00 USD

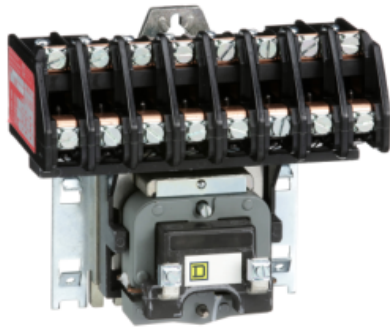

Main

Product or component type	Electrically Held Lighting Contactor
Range of product	8903L
Control Circuit	Separate control circuit

Complementary

Control Circuit Voltage	277 V AC 60 Hz
Inrush power in VA	150 VA 60 Hz
Hold-in power consumption in VA	35 VA 60 Hz
Current Rating	20 A tungsten 30 A fluorescent
Number of Poles	8P 8 NO
Control Unit	No control units
Pilot Light	No indicator
Electrical connection	Screw-clamp terminals
Height	5.00 in (127 mm)
Depth	3.11 in (79 mm)
Width	5.63 in (143 mm)

Environment

Enclosure Type	Not rated (open device)
Product certifications	UL Listed CSA

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ordering and shipping details

Category	21321 - 8903 L (NOT LX)
Discount Schedule	CP1
GTIN	00785901536208
Nbr. of units in pkg.	1
Package weight(Lbs)	3.72 lb(US) (1.69 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Package 1 Height	5.50 in (13.970 cm)
Package 1 width	7.00 in (17.780 cm)
Package 1 Length	8.00 in (20.320 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
PVC free	Yes
Halogen content performance	Halogen free plastic parts product

Contractual warranty

Warranty	18 months
----------	-----------