


Product data sheet

Characteristics

8903SMO2V04

lighting contactor, electrically held, 30 A, 3 pole, open, 277V 60Hz

Product availability : Non-Stock - Not normally stocked in distribution facility

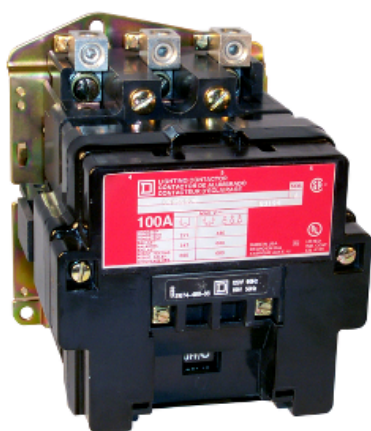

Main

Product	Electrically Held Lighting Contactor
Type	S

Complementary

Control Circuit Voltage	277 V AC 60 Hz
Current Rating	30 A
Number of Poles	3P
Control Units	No control units
Pilot Light	Without pilot light
Auxiliary Contacts	Without
Other Options	None
Electrical connection	Lugs
Height	3.50 in (89 mm)
Depth	4.21 in (107 mm)
Width	3.23 in (82 mm)

Environment

Enclosure Type	Not rated (open device) surface none
Product certifications	UL Listed CSA

Ordering and shipping details

Category	21325 - 8903 S (NOT S°C) ELECT.
Discount Schedule	CP1
GTIN	00785901455486

Nbr. of units in pkg.	1
Package weight(Lbs)	3.11 lb(US) (1.41 kg)
Returnability	No
Country of origin	MX

Packing Units

Package 1 Height	4.50 in (11.430 cm)
Package 1 width	5.80 in (14.732 cm)
Package 1 Length	7.90 in (20.066 cm)

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Not compliant
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty

Warranty	18 months
----------	-----------