

Product data sheet

Characteristics


9065SEO15

Overload Relay, Type S, melting alloy, separate mount overload, NEMA size 4, 3 pole, 3 phase, 133A, 600VAC

Product availability : Non-Stock - Not normally stocked in distribution facility



Price* : 393.70 USD

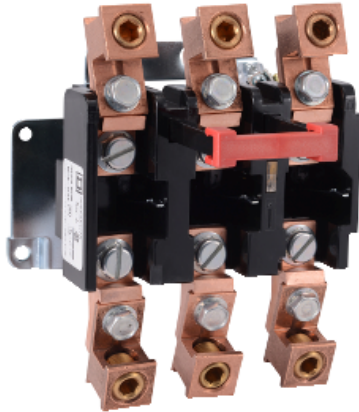

Main

Range of product	Separate Mounting
Thermal overload type	Melting alloy

Complementary

NEMA size	4
Number of thermal units required	3
Mounting support	Panel
[Ue] rated operational voltage	600 V AC
Height	6.97 in (177 mm)
Width	5.31 in (134.9 mm)
Depth	5.75 in (146.1 mm)

Ordering and shipping details

Category	21661 - 9065 A,C,F,G,S(NOT SS)
Discount Schedule	CP1
GTIN	00785901850823
Nbr. of units in pkg.	1
Package weight(Lbs)	4.29 lb(US) (1.95 kg)
Returnability	No
Country of origin	MX

Packing Units

Package 1 Height	6.40 in (16.256 cm)
------------------	---------------------

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package 1 width	8.50 in (21.590 cm)
Package 1 Length	6.40 in (16.256 cm)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
EU RoHS Directive	Not compliant
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty

Warranty	18 months
----------	-----------