

Product data sheet

Characteristics


9422TF2

Operating mechanism, flange mounted, variable depth, 200A, 600 V, H, K, J, R fuseholder, switch mechanism

Product availability : Non-Stock - Not normally stocked in distribution facility



Price* : 1,629.30 USD

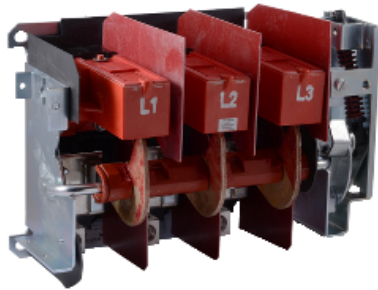

Main

Range	9422T
Product	Disconnect Switch
Disconnect Type	Fusible disconnect switch

Complementary

Mounting Type	Flange rod variable depth
Current Rating	200 A
Horsepower Rating	40 hp 200 V AC 60 hp 230 V AC 125 hp 460 V AC 150 hp 575 V AC 40 hp 250 V DC
Fuse Rating	200 A 250/600 V
Handle Type	Ordered separately
Fuse Type	H K J R

Environment

Certifications	CSA UL Recognized
----------------	----------------------

Ordering and shipping details

Category	21732 - 9422
----------	--------------

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Discount Schedule	CP1
GTIN	00785901043744
Nbr. of units in pkg.	1
Package weight(Lbs)	25.38 lb(US) (11.512 kg)
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	9.20 in (23.368 cm)
Package 1 width	12.10 in (30.734 cm)
Package 1 Length	20.70 in (52.578 cm)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------