Product data sheet Characteristics

CH361AWK

Safety switch, heavy duty, fusible, 30A, 600 VAC/ VDC, 3 poles, 20 hp, NEMA 12

Product availability: Stock - Normally stocked in distribution facility

SQUARE D



Price*: 1,001.00 USD



Main

Product	Single Throw Safety Switch	
Disconnect Type	Fusible disconnect	
Number of Poles	3	
Electrical Connection	Lugs	
Duty Rating	Heavy duty	

Complementary

Line Rated Current	30 A	
Factory Installed Neutral	None	
Mounting Type	Surface	
Voltage Rating	600 V AC/DC	
Maximum Horse Power Rating	5 hp 480 V at AC 50-60 Hz for 3 phase conforming to NEC 240.6 15 hp 480 V at AC 50-60 Hz for 3 phase conforming to NEC 430.52 7.5 hp 600 V at AC 50-60 Hz for 3 phase conforming to NEC 240.6 20 hp 600 V at AC 50-60 Hz for 3 phase conforming to NEC 430.52 5 hp 250 V at DC 15 hp 600 V at DC	
Wire Size	AWG 12AWG 6 aluminium AWG 14AWG 6 copper	
Tightening torque	45 lbf.in (5.08 N.m) 0.02 in² (13.3 mm²) (AWG 6) 40 lbf.in (4.52 N.m) 0.01 in² (8.367 mm²) (AWG 8) 35 lbf.in (3.95 N.m) 0.000.01 in² (2.065.261 mm²) (AWG 14AWG 10)	
Height	14.6 in (370.84 mm)	
Width	7.55 in (191.77 mm)	
Depth	4.96 in (125.98 mm)	

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.



Environment

Certifications	CSA
Enclosure Rating	NEMA 3R/12 galvannealed steel

Ordering and shipping details

<u> </u>	
Category	00153 - C,CH&CHU CANADA SW NON-NEG
Discount Schedule	DE1
GTIN	00785901995159
Nbr. of units in pkg.	1
Package weight(Lbs)	10.39 lb(US) (4.71 kg)
Returnability	Yes
Country of origin	US


Packing Units

Package 1 Height	5.50 in (13.970 cm)
Package 1 width	7.80 in (19.812 cm)
Package 1 Length	17.50 in (44.450 cm)

Offer Sustainability

Office Oddital lability		
Sustainable offer status	Green Premium product	
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
REACh Regulation	REACh Declaration	
REACh free of SVHC	Yes	
EU RoHS Directive	Compliant EU RoHS Declaration	
Mercury free	Yes	
RoHS exemption information	Yes	
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.	
Environmental Disclosure	Product Environmental Profile	
PVC free	Yes	

Approximate Dimensions

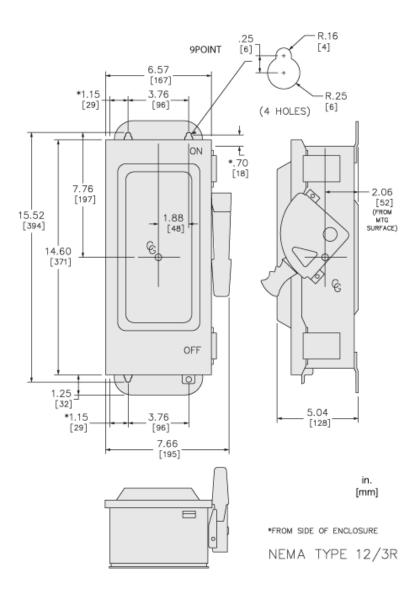

CH361AWK

Connections and Wiring Diagrams

WIRING DIAGRAMS			
FUSIBLE		NOT FUSIBLE	
	1 9 9 9 1 7 - 7 - 7	7-7-7	
H221AWK	H321AWK H361AWK	HU361AWK HU361AWKEI	