

## Product data sheet

### Characteristics

# H321AWK

Safety switch, heavy duty, fusible, 30A, 3 poles,  
7.5 hp, 240 VAC/250 VDC, NEMA 12

Product availability : Stock - Normally stocked in distribution facility



Price\* : 605.00 USD



### Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	None
Phase	3 phase
Number of Poles	3
Current Rating	30 A
Voltage Rating	250 V DC 240 V AC
Enclosure Rating	NEMA 3R/12 galvanized steel
Maximum Horse Power Rating	1.5 hp 240 V at AC 50-60 Hz for 1 phase conforming to NEC 240.6 3 hp 240 V at AC 50-60 Hz for 3 phase conforming to NEC 240.6 3 hp 240 V at AC 50-60 Hz for 1 phase conforming to NEC 430.52 7.5 hp 240 V at AC 50-60 Hz for 3 phase conforming to NEC 430.52 5 hp 250 V at DC

### Complementary

Short Circuit Current Rating	10 kA H or K 200 kA R, J or L
Fuse type	H or K R, J or L
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	3-wire (3P)
Wire Size	AWG 12...AWG 6 aluminium AWG 14...AWG 6 copper

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Jul 30, 2021

Tightening torque	45 lbf.in (5.08 N.m) 0.02 in² (13.3 mm²) (AWG 6) 40 lbf.in (4.52 N.m) 0.01 in² (8.367 mm²) (AWG 8) 35 lbf.in (3.95 N.m) 0.00...0.01 in² (2.06...5.261 mm²) (AWG 14...AWG 10)
Depth	4.96 in (125.98 mm)
Width	6.63 in (168.40 mm)
Height	14.6 in (370.84 mm)
Net Weight	11.02 lb(US) (5 kg)

## Environment

Certifications	UL listed file E2875
----------------	----------------------

## Ordering and shipping details

Category	00113 - H&HU SW,2&3P,N12,30-200A
Discount Schedule	DE1
GTIN	00785901480150
Nbr. of units in pkg.	1
Package weight(Lbs)	10.36 lb(US) (4.699 kg)
Returnability	Yes
Country of origin	US

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	5.40 in (13.716 cm)
Package 1 width	7.60 in (19.304 cm)
Package 1 Length	17.50 in (44.45 cm)

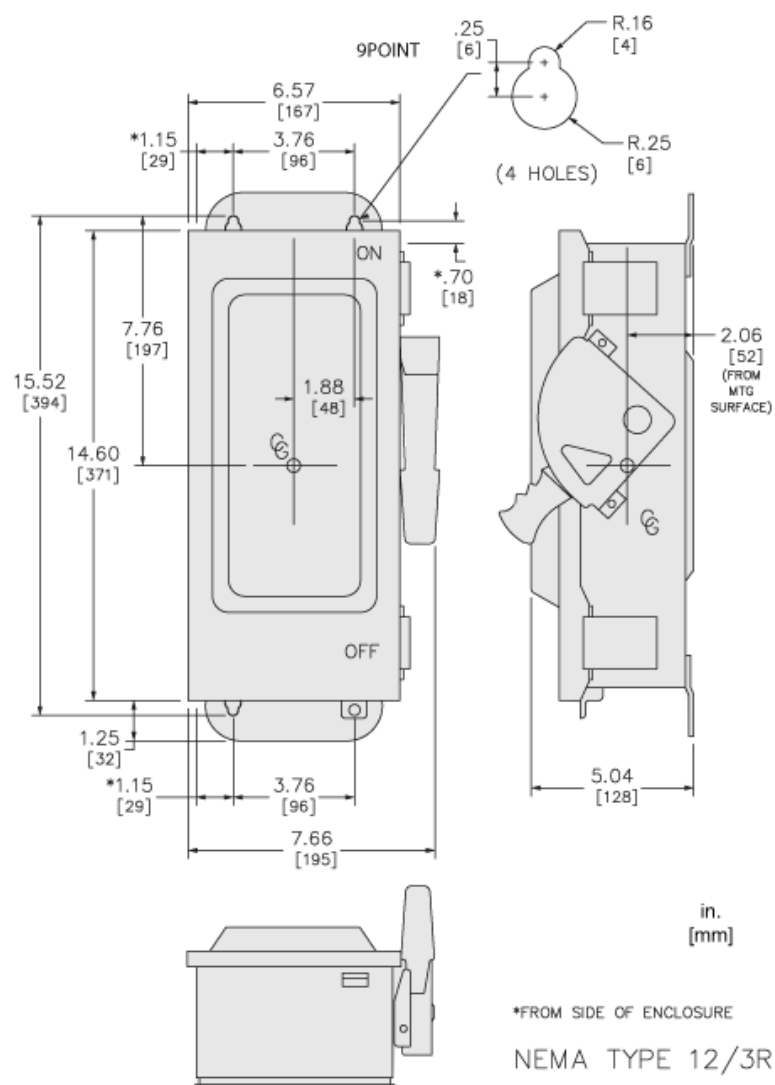
## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
PVC free	Yes




## Contractual warranty

Warranty	18 months
----------	-----------

## Approximate Dimensions



Connections and Wiring Diagrams

WIRING DIAGRAMS		
FUSIBLE		NOT FUSIBLE
		
H221AWK	H321AWK H361AWK	HU361AWK HU361AWKEI