



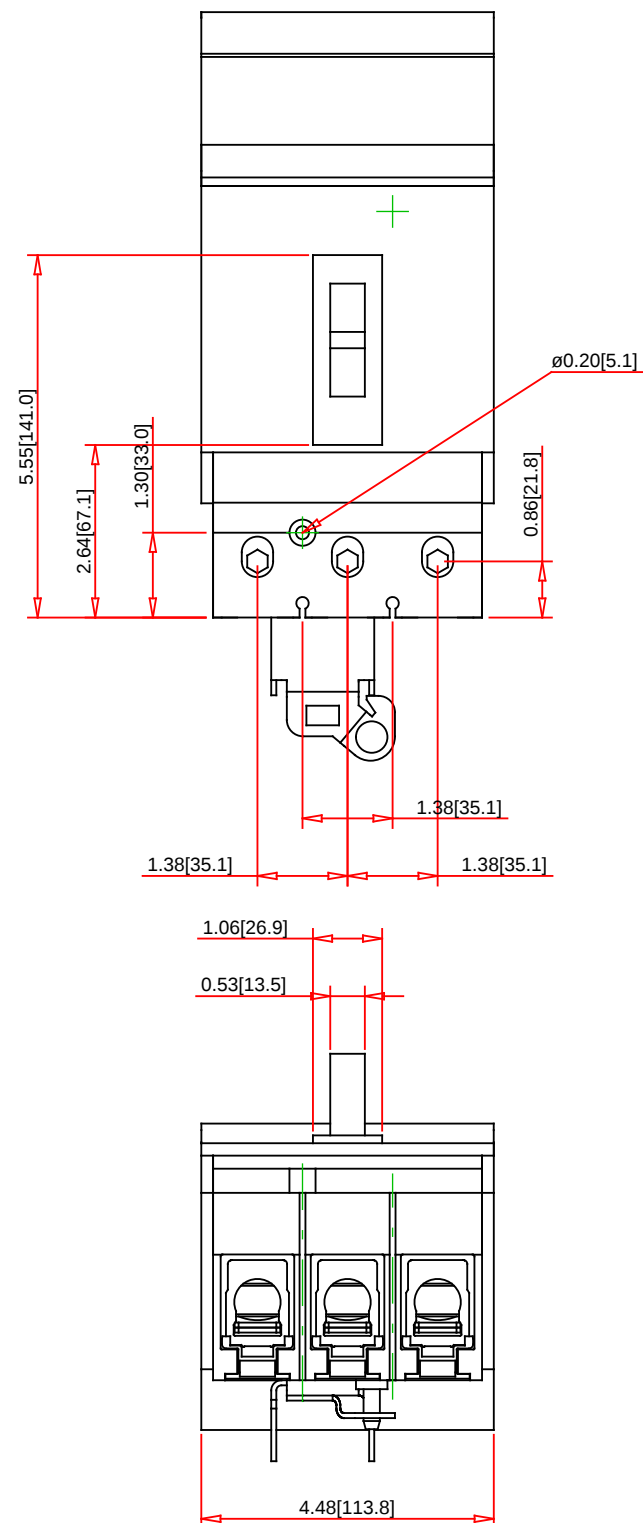

Note:
 - Drawings Not To Scale
 - Drawings Subject to Change Without Notice
 - Dimensions are inches next to [Millimeters]

Part No.:

JDA36200

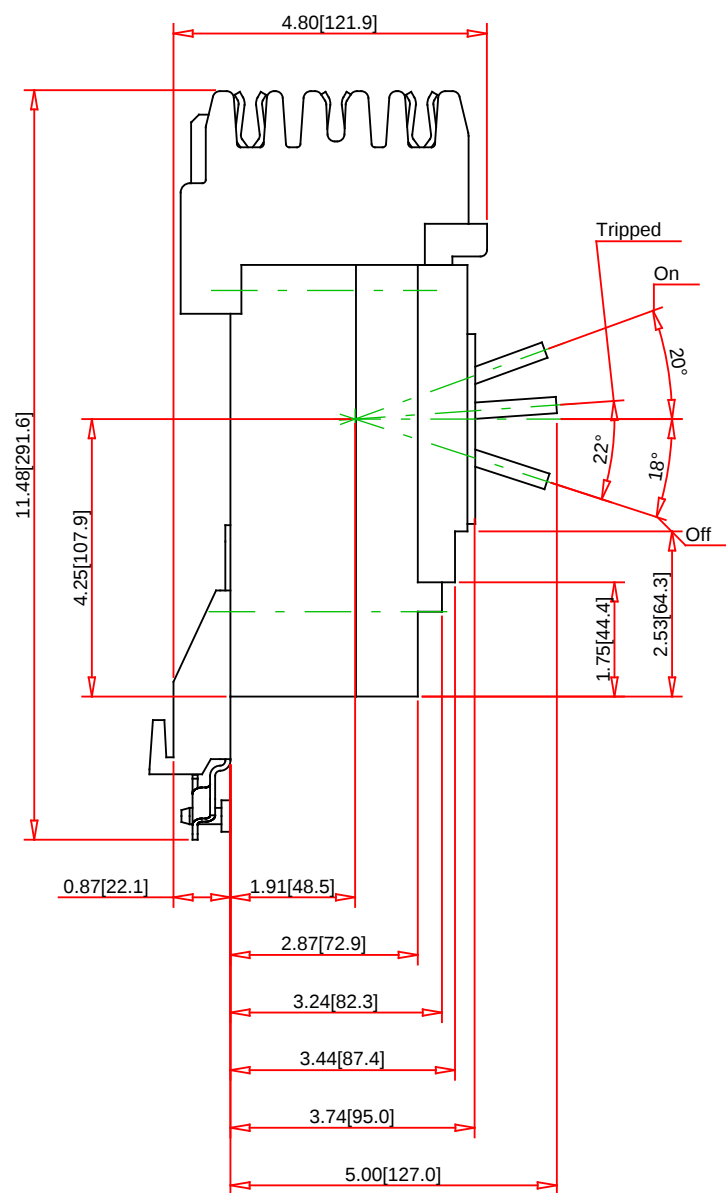

Schneider Electric United States
 North American Division
 Boston One Campus
 800 Federal Street
 Andover, MA 01810, USA
 Phone: +1 8773425173
 Email: CCC@us.schneider-electric.com

Technical Information:

General Application: Provides overload and short circuit protection
 For Use With: I-line Panelboards and Switchboards
 Approvals: UL Listed - CSA Certified - IEC Rated
 Mounting Type: I-Line Plug-On
 Terminal Type: I-Line Connection (ON end) - Lugs (OFF end)
 Wire Size: #3/0-350 AWG/kcmil(Al/Cu)
 Weight: 5 Pounds
 Mounting Height: 4.5 Inches

Description: PowerPact J-frame Thermal Magnetic Circuit Breaker
 Number of Poles: 3-Pole
 Ampere Rating: 200A
 Voltage Rating: 600VAC
 Interrupting Rating: 25kA at 240VAC - 18kA at 480VAC - 14kA at 600VAC
 Fixed AC Magnetic Trip: Low: 1000A - High: 2000A
 Phase Connection: ABC

Specification: