Product data sheet
Characteristics

QOXD332
Mini circuit breaker, QO, 32A, 3 pole, 240/415 VAC, 3 kA, plug in mount

Price* : 248.00 USD



Main

Product	Miniature circuit-breaker
Range	QO
Current Rating	32 A
Voltage Rating	240/415 V AC
Mounting Type	Plug-in
Number of Poles	3P
Circuit Breaker Type	Standard

Complementary

Interrupt Rating	Icu 3 kA 240/415 V AC 50/60 Hz IEC 947-2
Number of Panel Spaces	3
Tightening Torque	44.25 lbf.in (5 N.m) 0.02…0.04 in² (10…25 mm²) (AWG 8...AWG 2)
Height	3 in (76.20 mm)
Width	2.23 in (56.64 mm)
Depth	2.91 in (73.91 mm)

Environment

Certifications	IEC
Ambient Rating	104 °F (40 °C)

Ordering and shipping details

Category	00920-QO INTERNATIONAL SENA
Discount Schedule	DE2A
GTIN	00785901726494
Nbr. of units in pkg.	1

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package weight(Lbs)	13.76 oz (390.089 g)
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.30 in (5.842 cm)
Package 1 width	3.40 in (8.636 cm)
Package 1 Length	3.80 in (9.652 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months

Dimensions

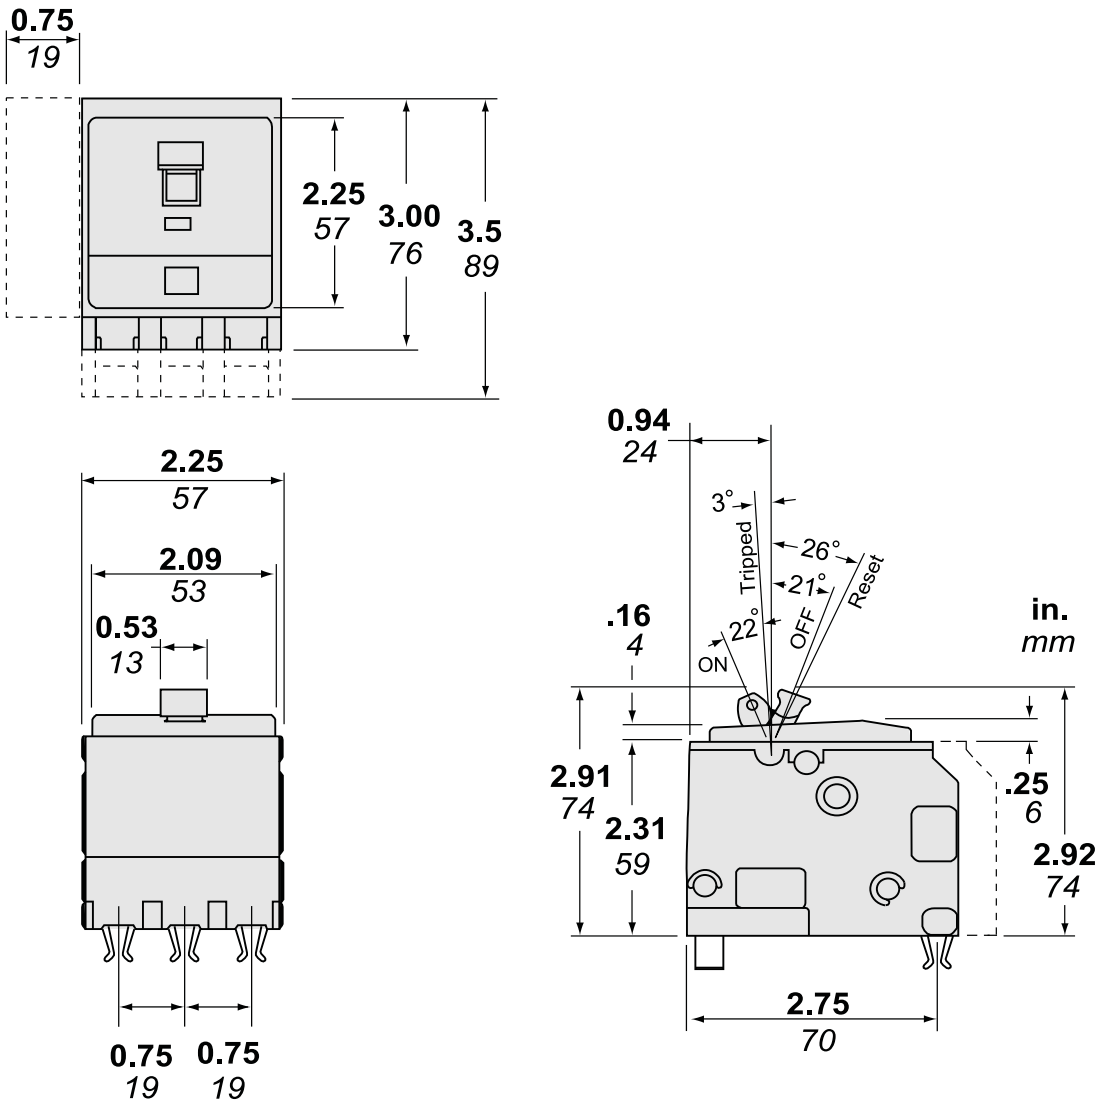

Dimensions are approximate. Refer to technical documentation for additional detail.