Product data sheet Characteristics

RC816F200CH

Meter mains, Homeline, combination service entrance, ringless socket, 200A, surface mount, maximum 8 spaces, 16 circuits, horn bypass

Product availability: Stock - Normally stocked in distribution facility

SQUARE D

Price*: 1,227.00 USD



Main

Product or component type	Meter Mains	;
Range of product	Homeline	— •

Complementary		
Line Rated Current	200 A	
Short-circuit current	22 kA	
Network number of phases	1	
Meter socket type	Ringless	
Mounting	Surface	
Number of spaces	8	
Number of circuits	16	
Number of Tandem Breakers	8	
Hub type	A	
Electrical connection	Lugs line side Feed-thru lugs service ground	
Wire Size	AWG 6350 kcmil aluminium/copper)line side AWG 12AWG 2/0 aluminium/copper)service ground	
Tightening torque	Main lugs 250 lb.in, AWG 6350 kcmil, aluminium/copper Service ground 50 lb.in, AWG 14AWG 2/0, copper Service ground 50 lb.in, AWG 12AWG 2/0, aluminium Branch lugs 35 lb.in, AWG 6AWG 4, aluminium/copper Branch lugs 25 lb.in, AWG 8, aluminium/copper Branch lugs 20 lb.in, AWG 14AWG 10, copper Branch lugs 20 lb.in, AWG 12AWG 10, aluminium Cover 10 lb.in	
Disconnect	Service disconnect (ordered separately)	

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Main Breaker Rating	200 A
Branch Breaker Rating	200 A
Service feed location	OH UG
Bypass type	Horn bypass
Height	35.13 in (892.30 mm)
Width	14.37 in (365.00 mm)
Depth	5.07 in (128.78 mm)

Environment

Product certifications UL E-6294

Ordering and shipping details

Category	00048 - HOM METER MAINS
Discount Schedule	DE3A
GTIN	00785901863960
Nbr. of units in pkg.	1
Package weight(Lbs)	42.4 lb(US) (19.23 kg)
Returnability	Yes
Country of origin	MX

Packing Units

PCE
5.90 in (14.986 cm)
14.80 in (37.592 cm)
36.50 in (92.71 cm)
PAL
21
902.00 lb(US) (409.14 kg)
40.00 in (101.6 cm)
40.00 in (101.6 cm)
48.00 in (121.92 cm)


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.


Contractual warranty

Warranty	18 months

Dimensions

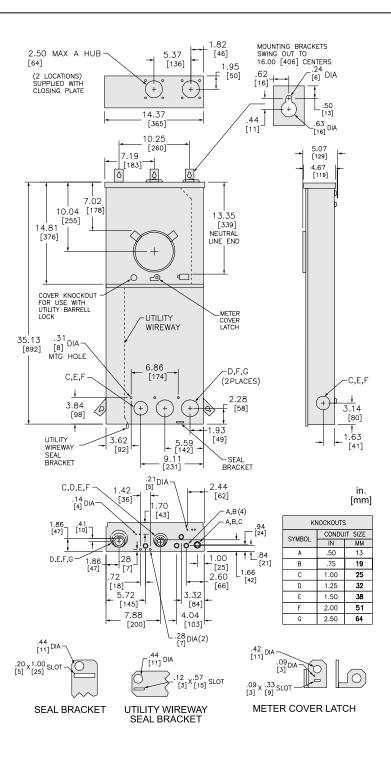

Wiring Diagram

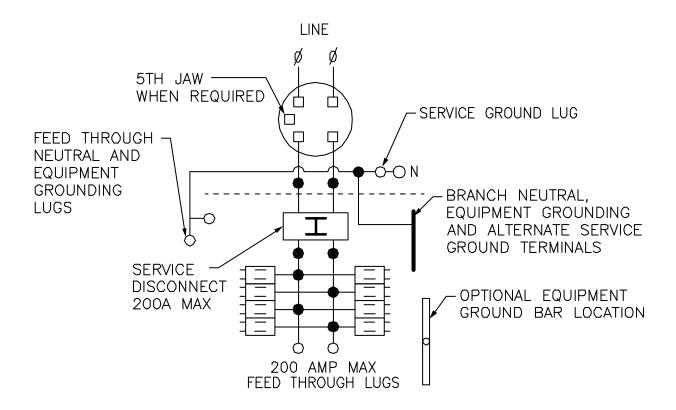

TWO SINGLE POLE, ONE PLUG-ON SPACE TYPE HOMT OR ONE SINGLE POLE TYPE HOM. TWO POLE TYPE HOM OR HOMT (15-100A) MAY PLUG ON TWO ADJACENT SPACES. TWO POLE HOMA (150-200A) MAY PLUG ON FOUR ADJACENT SPACES.

A SQUARE D UL LISTED SECONDARY SURGE ARRESTER MAY PLUG ON TWO ADJACENT SPACES, ORDER CATALOG NO. HOM2175SB.