Product data sheet Characteristics

SC816D150C

Meter mains, Homeline, combination service entrance, ringed socket, 150A, surface mount, maximum 8 spaces, 16 circuits, no bypass

Product availability: Stock - Normally stocked in distribution facility

SQUARE D

Price*: 1,250.00 USD



Main

Product or component type	Meter Mains	-604
Range of product	Homeline	_ ;

Complementary		
Line Rated Current	150 A	
Short-circuit current	10 kA	
Network number of phases	1	
Meter socket type	Ringed	
Mounting	Surface	
Number of spaces	8	
Number of circuits	16	
Number of Tandem Breakers	8	
Hub type	A-L A	
Electrical connection	Lugs line side Feed-thru lugs service ground Feed-thru lugs load side	
Wire Size	AWG 6300 kcmil aluminium/copper)line side AWG 12AWG 1/0 aluminium/copper)service ground AWG 6250 kcmil aluminium/copper)load side	
Tightening torque	Main lugs 250 lb.in, AWG 6300 kcmil, aluminium/copper Service ground 50 lb.in, AWG 14AWG 1/0, copper Service ground 50 lb.in, AWG 12AWG 1/0, aluminium Lugs 250 lb.in, AWG 6250 kcmil, aluminium/copper Branch lugs 50 lb.in, AWG 3AWG 1/0, aluminium/copper Branch lugs 45 lb.in, AWG 6AWG 4, aluminium/copper Branch lugs 40 lb.in, AWG 8, aluminium/copper	

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Branch lugs 35 lb.in, AWG 14AWG 10, copper	
Branch lugs 35 lb.in, AWG 12AWG 10, alumini	um
Cover 10 lb in	

Cover 10 lb.in

Disconnect	Service disconnect (factory installed)
Main Breaker Rating	150 A
Branch Breaker Rating	100 A
Service feed location	OH UG
Bypass type	No bypass
Height	34.00 in (863.60 mm)
Width	14.95 in (379.73 mm)
Depth	7.12 in (180.85 mm)

Environment

Product certifications	UL F-6294	

Ordering and shipping details

0 FF	
Category	00048 - HOM METER MAINS
Discount Schedule	DE3A
GTIN	00785901859154
Nbr. of units in pkg.	1
Package weight(Lbs)	52.08 lb(US) (23.62 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Package 1 Height	7.50 in (19.050 cm)	
Package 1 width	15.60 in (39.624 cm)	
Package 1 Length	33.50 in (85.090 cm)	


Offer Sustainability

21101 Gaotamasmity	
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.


Contractual warranty

Warranty	18 months	

Dimensions

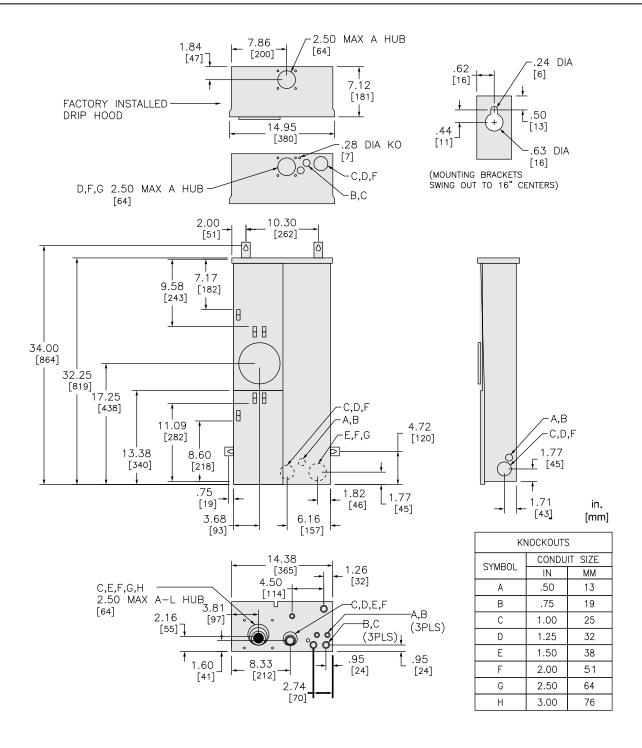

Wiring Diagram

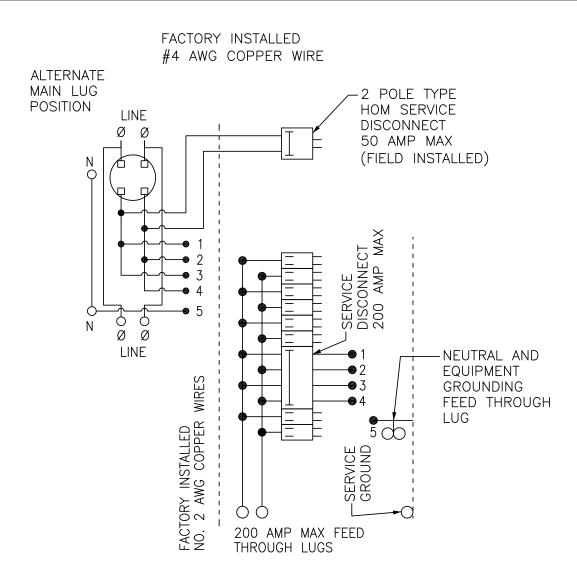

TWO SINGLE POLE, ONE PLUG-ON SPACE TYPE HOMT OR ONE SINGLE POLE, ONE PLUG-ON SPACE TYPE HOM. TWO POLE TYPE HOM, HOMA OR HOMT MAY PLUG-ON TWO ADJACENT SPACES. A 100 AMP MAX. CIRCUIT BREAKER MAY BE INSTALLED IN THE LOWEST POSITION IN THE BRANCH PANEL. ALL OTHER POSITIONS ARE LIMITED TO 70 AMP MAX. CIRCUIT BREAKERS.