



FEMALE END VIEW




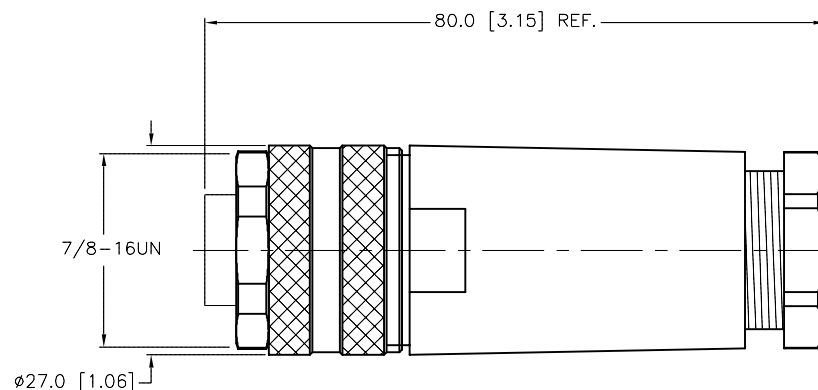


SPECIFICATIONS

HOUSING MATERIAL/COLOR	GLASS FILLED NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
GASKET MATERIAL	NITRILE
O-RING MATERIAL	NITRILE
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	16 AWG
TERMINATION METHOD	SCREW TERMINAL
CABLE GRIP RANGE	12-14mm
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY			DRFT	CK	DATE	04/07/11	DESCRIPTION B 4151-0/16
SEE SPECIFICATIONS					APVD		SCALE	1=1.0	
FINISH		CONTACT TURCK FOR MORE INFORMATION			UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U6418	REV C
SEE SPECIFICATIONS									
				DO NOT SCALE THIS DRAWING			FILE: U6418		SHEET 1 OF 1

C	UPDATE COUPLING NUT MATERIAL	NF	07/29/20	76052
REV	DESCRIPTION	BY	DATE	ECO NO.