

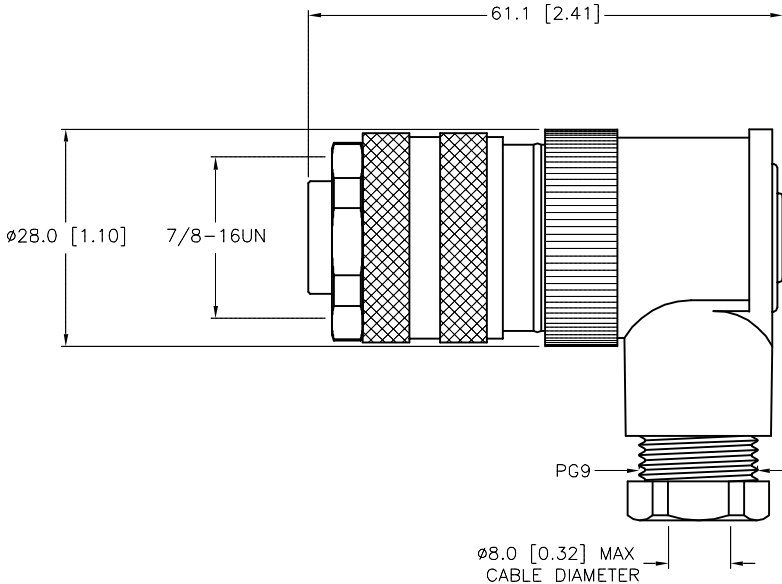
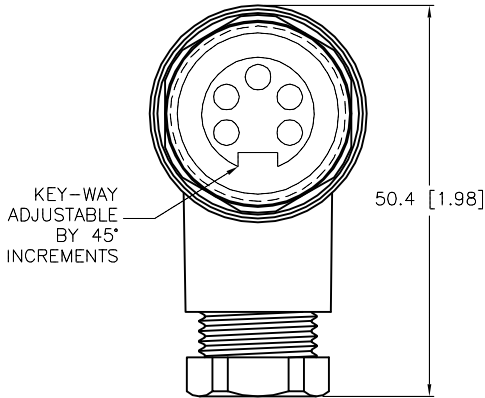



FEMALE END VIEW		SPECIFICATIONS	
 		HOUSING MATERIAL/COLOR	NYLON or PBT/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
		RATED CURRENT [A]	9.0 A
		RATED VOLTAGE [V]	600 V
		MAXIMUM WIRE SIZE	16 AWG
		TERMINATION METHOD	SCREW TERMINAL
		CABLE GRIP RANGE	PG9 = 6-8mm
		TEMPERATURE RATING	-40°C to +85°C (-40°F to +185°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

FIELD WIREABLE MINIFAST RIGHT-ANGLE CONNECTOR					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
					1.				TURCK INC <i>High Technology Sensors and Automation Controls</i>					
					2.									
					3.									
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		JB		DATE 07/17/00		DESCRIPTION B 4251-0/9		
SEE SPECIFICATIONS		APVD				SCALE 1 = 1.0								
FINISH		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV		
SEE SPECIFICATIONS						DO NOT SCALE THIS DRAWING		U6417-01		B				
B		UPDATE RATED VOLTAGE			RDS		05/20/14		45918		FILE: U6417-01		SHEET 1 OF 1	
REV		DESCRIPTION			BY		DATE		ECO NO.					