



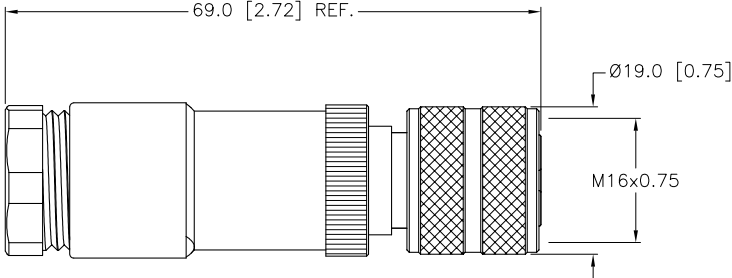
FEMALE END VIEW




 M16 connector

SPECIFICATIONS


HOUSING MATERIAL/COLOR	GLASS FILLED NYLON or PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or TeCU/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	15.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	14 AWG
TERMINATION METHOD	SCREW TERMINAL
TEMPERATURE RATING	−40°C to +90°C (−40°F to +194°F)
PROTECTION CLASS	IP 67/NEMA 6P
CABLE GRIP RANGE	PG 11 = 8–11mm



WIRE SIDE VIEW
OF CONTACT HOLDER
TO SHOW LABEL DETAILS

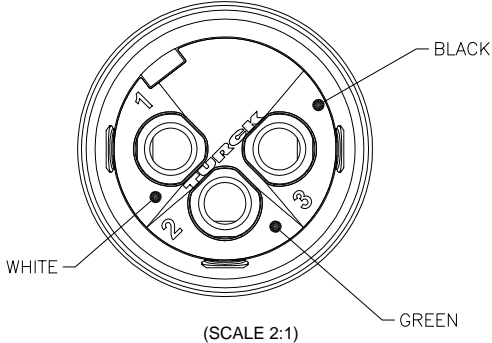


(SCALE 2:1)



CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div>TURCK INC</div> <div>High Technology Sensors and Automation Controls</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>	
1.	SEE SPECIFICATIONS			DRFT	RDS	DATE 12/02/08	DESCRIPTION BK 34-0
2.				DSGN	SCALE 1=1.0		
3.		SEE SPECIFICATIONS	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV B
4.			MILLIMETER [INCH]		U2-14093		
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: U2-14093	
						SHEET 1 OF 1	