



FEMALE END VIEW


 M16 connector

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	60 V AC/DC
MAX WIRE SIZE [AWG]	24 AWG
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS IEC IP67

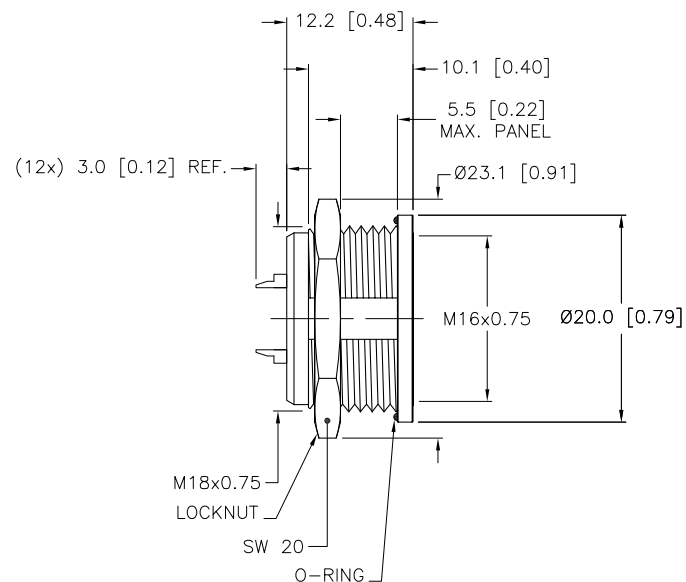

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK inc <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
						
	MATERIAL	DRFT	RDS	DATE	07/27/07	DESCRIPTION BKF 12
	SEE SPECIFICATIONS	DSGN		SCALE	1=.7	
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.	REV
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION	U0882-24
		DO NOT SCALE THIS DRAWING			FILE: U0882-24	SHEET 1 OF 1

A	DRAWING RELEASE	RWC	08/01/07	
REV	DESCRIPTION	BY	DATE	ECO NO.