


FEMALE END VIEW

M16 connector



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	60 VAC/VDC
MAX WIRE SIZE [AWG]	24 AWG
TEMPERATURE RANGE	-30°C to +95°C (-22°F to +203°F)
PROTECTION CLASS	MEETS IEC IP67

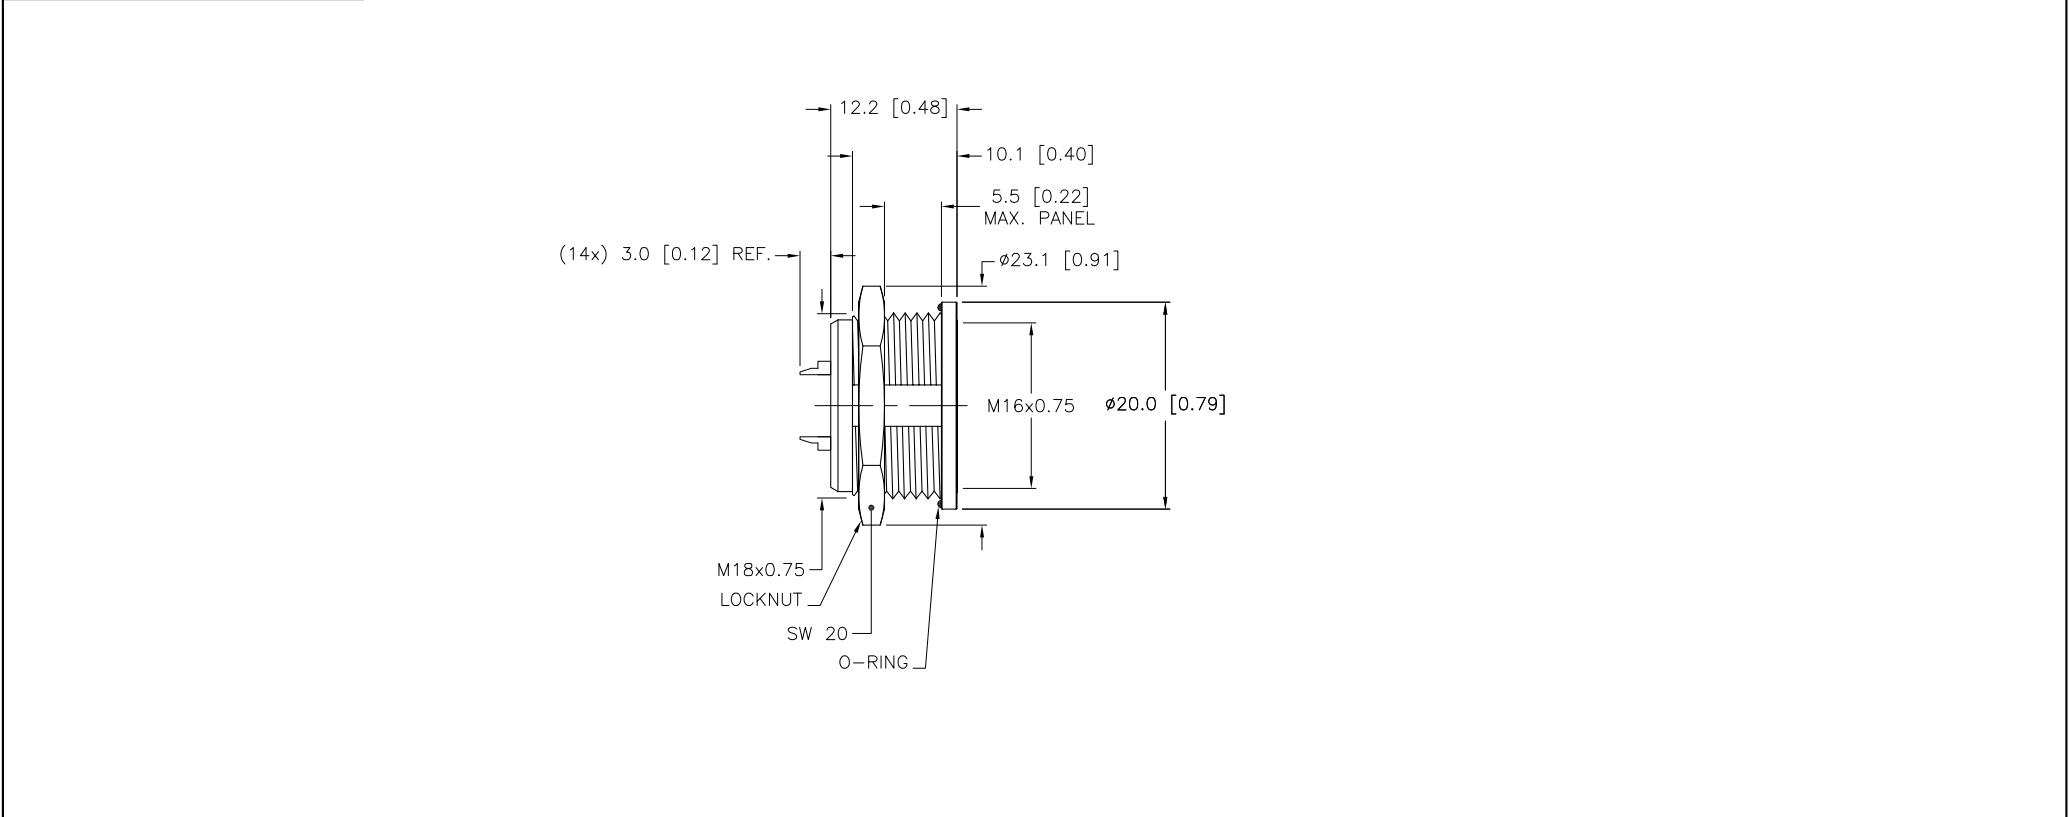

SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div> <div>TURCK inc <i>High Technology Sensors and Automation Controls</i></div>										
					1. 2. 3. 4.																
										MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS		DATE 05/15/09		DESCRIPTION BKF 14	
										SEE SPECIFICATIONS					DSGN		SCALE 1=.7				
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT								IDENTIFICATION NO.		REV				
							SEE SPECIFICATIONS					MILLIMETER [INCH]				U0932-98		A			
					DO NOT SCALE THIS DRAWING							FILE: U0932-98		SHEET 1 OF 1							
					A	DRAWING RELEASE			RWC	12/20/10	33605										
REV	DESCRIPTION			BY	DATE	ECO NO.															