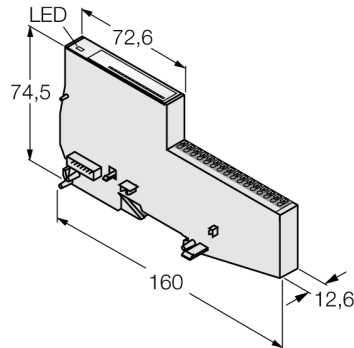


BL20 Economy Module

4 Analog Outputs for Current/Voltage

BL20-E-4AO-U/I



Functional principle







Electronics and connection technology are integrated in the housing. A base module is not needed. Economy modules and modules with separate electronics and connection technology can be fitted into a station, provided the base modules feature tension spring connections.

The use of gateways makes economy modules completely independent from the higher level fieldbus.

Type designation	BL20-E-4AO-U/I
Ident-No.	6827328
Number of channels	4
Rated voltage from the supply terminal	24 VDC
Admissible range	18...30 VDC
Nominal current from field supply	≤ 130 mA
Nominal current from module bus	≤ 50 mA
Power dissipation, typical	≤ 2.6 W
Output connectivity	Push-in
Outputs	
Output type	0/4 ... 20 mA or -10/0 ... +10 VDC
Load resistance, resistive	< 0.45 kΩ (current) or > 1 kΩ (voltage) kΩ
Load resistance, inductive	< 0.01 mH (voltage mode) mH
Load resistance, capacitive	< 1 μF (current mode) μF
Electrical isolation	electronics for the field level
Basic fault limit at 23 °C	< 0.2 %
Temperature coefficient	< 200 ppm / °C of full scale
Resolution	16 Bit
Measured-value display	16 bit signed integer Presentation: 16 bit signed integer Presentation: 12 bit left-justified
Cycle time	≤ 50 ms
Number of diagnostics bytes	4
Number of parameter bytes	12
Dimensions (W x L x H)	12.6 x 160 x 74.6mm
Approvals	CE, Zone2, ClassI, Div.2.
Operating temperature	0 to +55 °C
Storage temperature	-25...+85 °C
Relative humidity	5 to 95% (internal), Level RH-2, no condensation (at 45 °C storage)
Vibration test	acc. to EN 61131
Shock test	acc. to IEC 68-2-27
Drop and topple	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Electromagnetic compatibility	acc. to EN 50,082-2
Protection class	IP20

BL20 Economy Module
4 Analog Outputs for Current/Voltage
BL20-E-4AO-U/I

Terminal assignment

	Analog Outputs	Pin Assignment U 1  2  3  4  I 1  2  3  4  
---	-----------------------	---