




MALE END VIEW

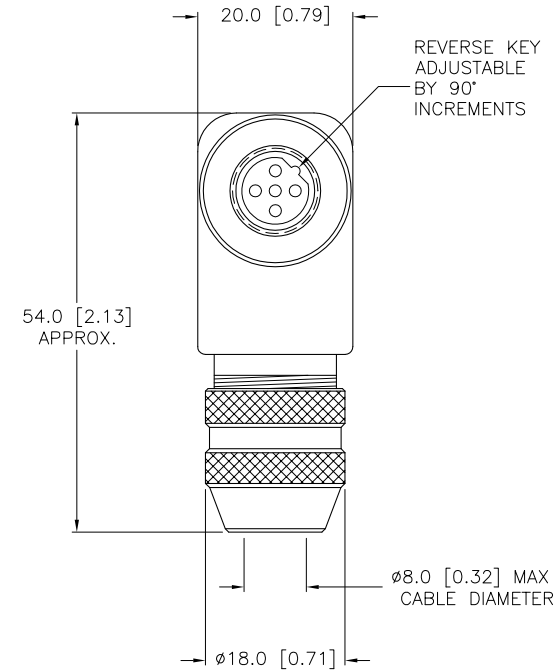

SPECIFICATIONS

CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	60V
MAXIMUM WIRE SIZE	18 AWG
CABLE GRIP RANGE	6–8mm
TEMPERATURE RATING	–25°C to +85°C (–13°F to +185°F)
PROTECTION CLASS	IEC IP67
WIRE TERMINATION	SCREW TERMINAL

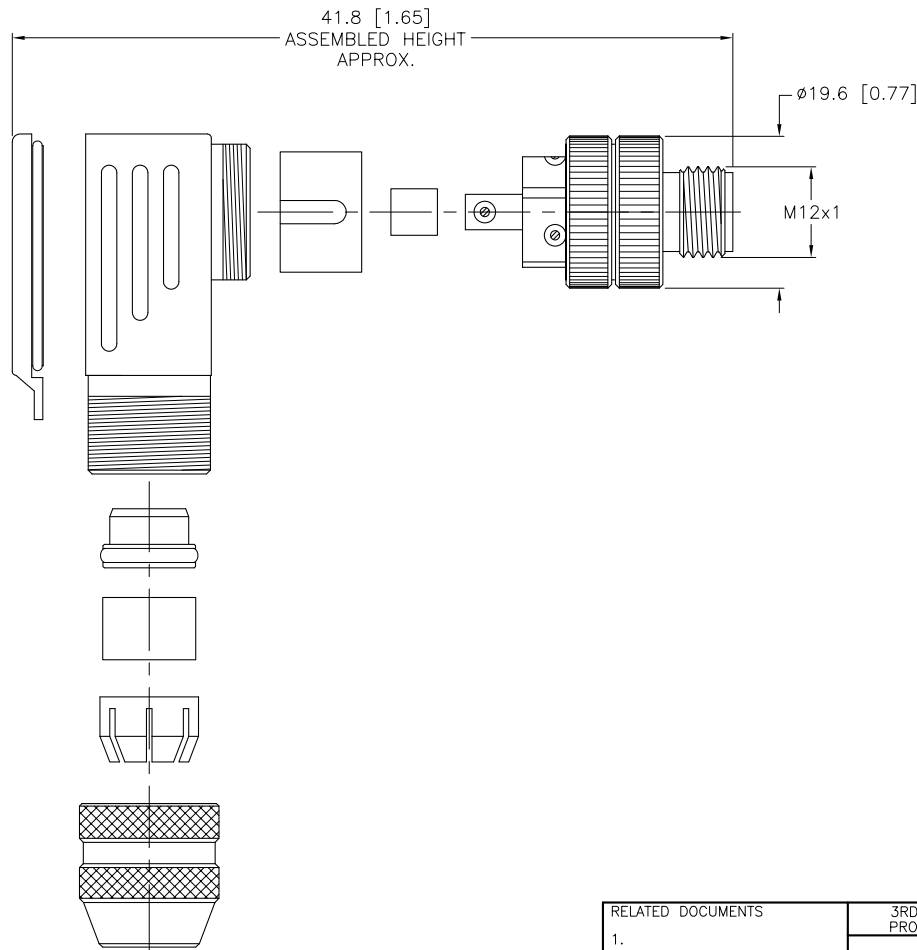

SOURCE DRAWING - FOR REFERENCE ONLY

ALL METAL SHIELDED FIELD WIREABLE CONNECTOR

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
		DRFT	JB	DATE	07/24/00
		DSGN	JB	SCALE	1=1.0
		UNIT OF MEASUREMENT		DESCRIPTION	
MATERIAL	SEE SPECIFICATIONS	MILLIMETER [INCH]		BMSWS 8251-0/9	
FINISH	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	U8150-00
		DO NOT SCALE THIS DRAWING		FILE: U8150-00	REV B
				SHEET 1 OF 1	

B	UPDATE SPECIFICATIONS, SEE ECO	RDS	02/17/11	34270
REV	DESCRIPTION	BY	DATE	ECO NO.