



FEMALE END VIEW




SPECIFICATIONS

CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	60 V
MAXIMUM WIRE SIZE	18 AWG
CABLE GRIP RANGE	6–8mm
TEMPERATURE RATING	–25°C to +85°C (–13°F to +185°F)
PROTECTION CLASS	IEC IP67
WIRE TERMINATION	SCREW TERMINAL

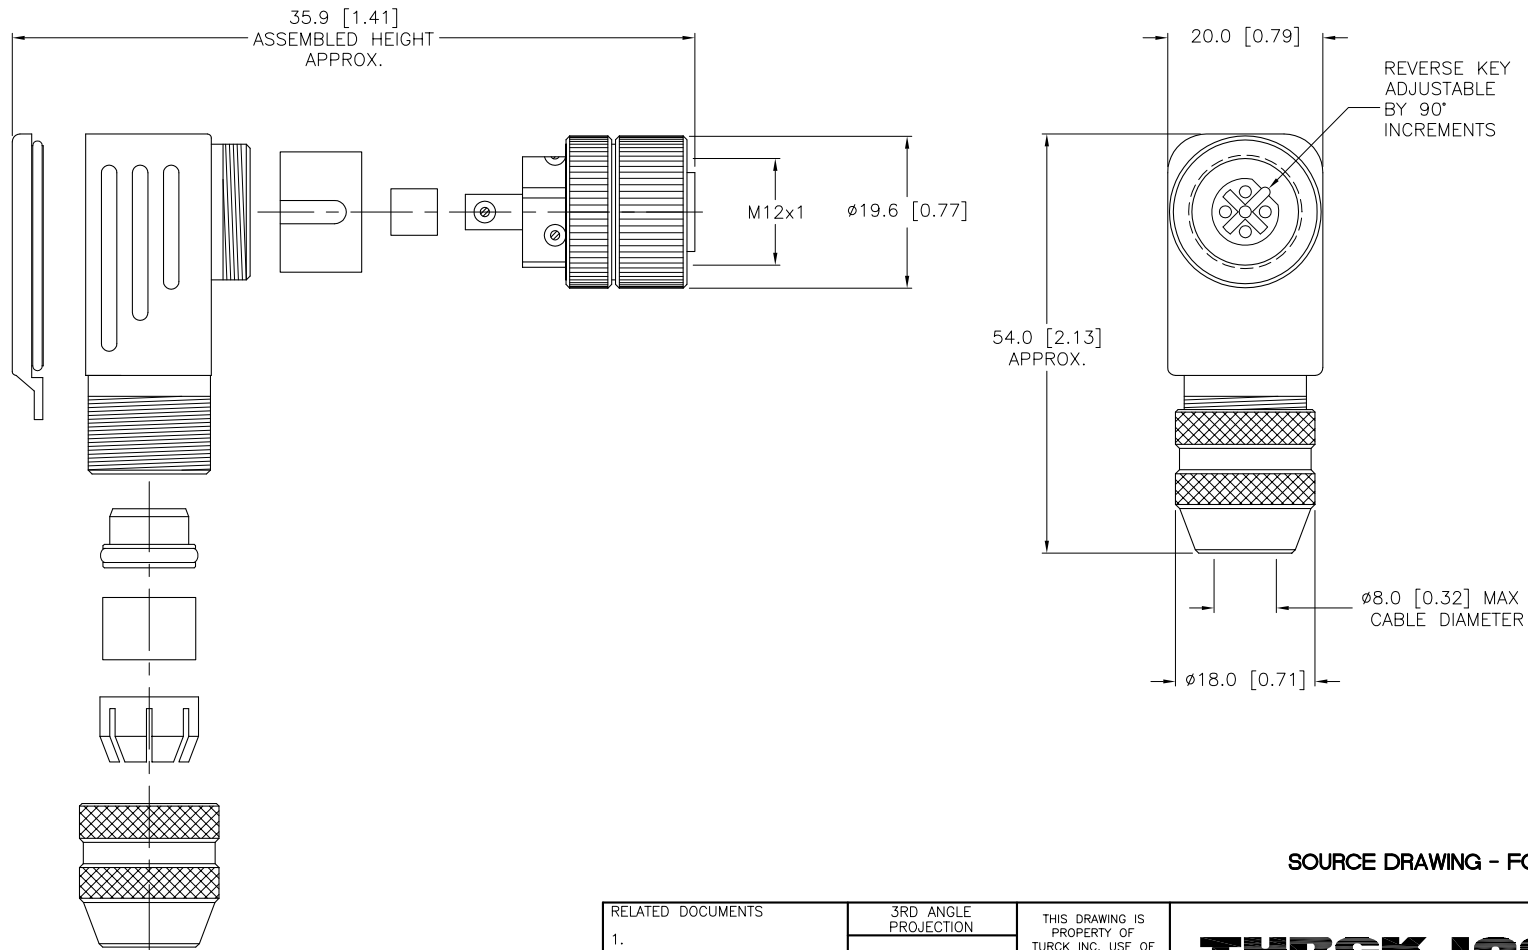

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK inc High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.		DRFT	JB	DATE	07/24/00
2.		DSGN		SCALE	1=1.0
3.		UNIT OF MEASUREMENT			DESCRIPTION
4.		MILLIMETER [INCH]			
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DO NOT SCALE THIS DRAWING			BMWS 8251-0/9
SEE SPECIFICATIONS					
FINISH		CONTACT TURCK FOR MORE INFORMATION			
SEE SPECIFICATIONS		IDENTIFICATION NO.			REV
		U8150-0			B
		FILE: U8150-0			SHEET 1 OF 1

ALL METAL SHIELDED FIELD WIREABLE CONNECTOR

B	UPDATE SPECIFICATIONS, SEE ECO	RDS	02/17/11	34270
REV	DESCRIPTION	BY	DATE	ECO NO.