



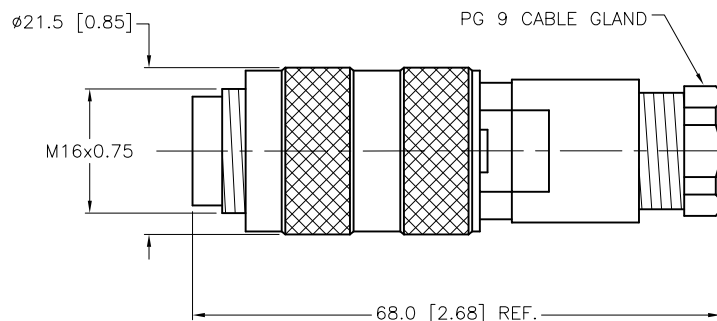
MALE END VIEW




 M16 connector

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
HOUSING MATERIAL	NYLON
COUPLING NUT MATERIAL	BRASS
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	60 V AC/DC
TEMPERATURE RANGE	-40° C to +85° C
PROTECTION CLASS	MEETS IEC IP67
CABLE GLAND	PG 9 - ACCEPTS 6-8mm CABLE
TERMINATION TYPE	SOLDER CUP



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div>TURCK INC <i>High Technology Sensors and Automation Controls</i></div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>						
1.										
2.		<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div> <div>CONTACT TURCK FOR MORE INFORMATION</div>		DRFT	RDS	DATE	12/09/04	DESCRIPTION BS 12-0		
3.				APVD		SCALE	1=1.0			
4.				UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U0896-12		REV B
				DO NOT SCALE THIS DRAWING						
MATERIAL						FILE: U0896-12		SHEET 1 OF 1		
FINISH										