

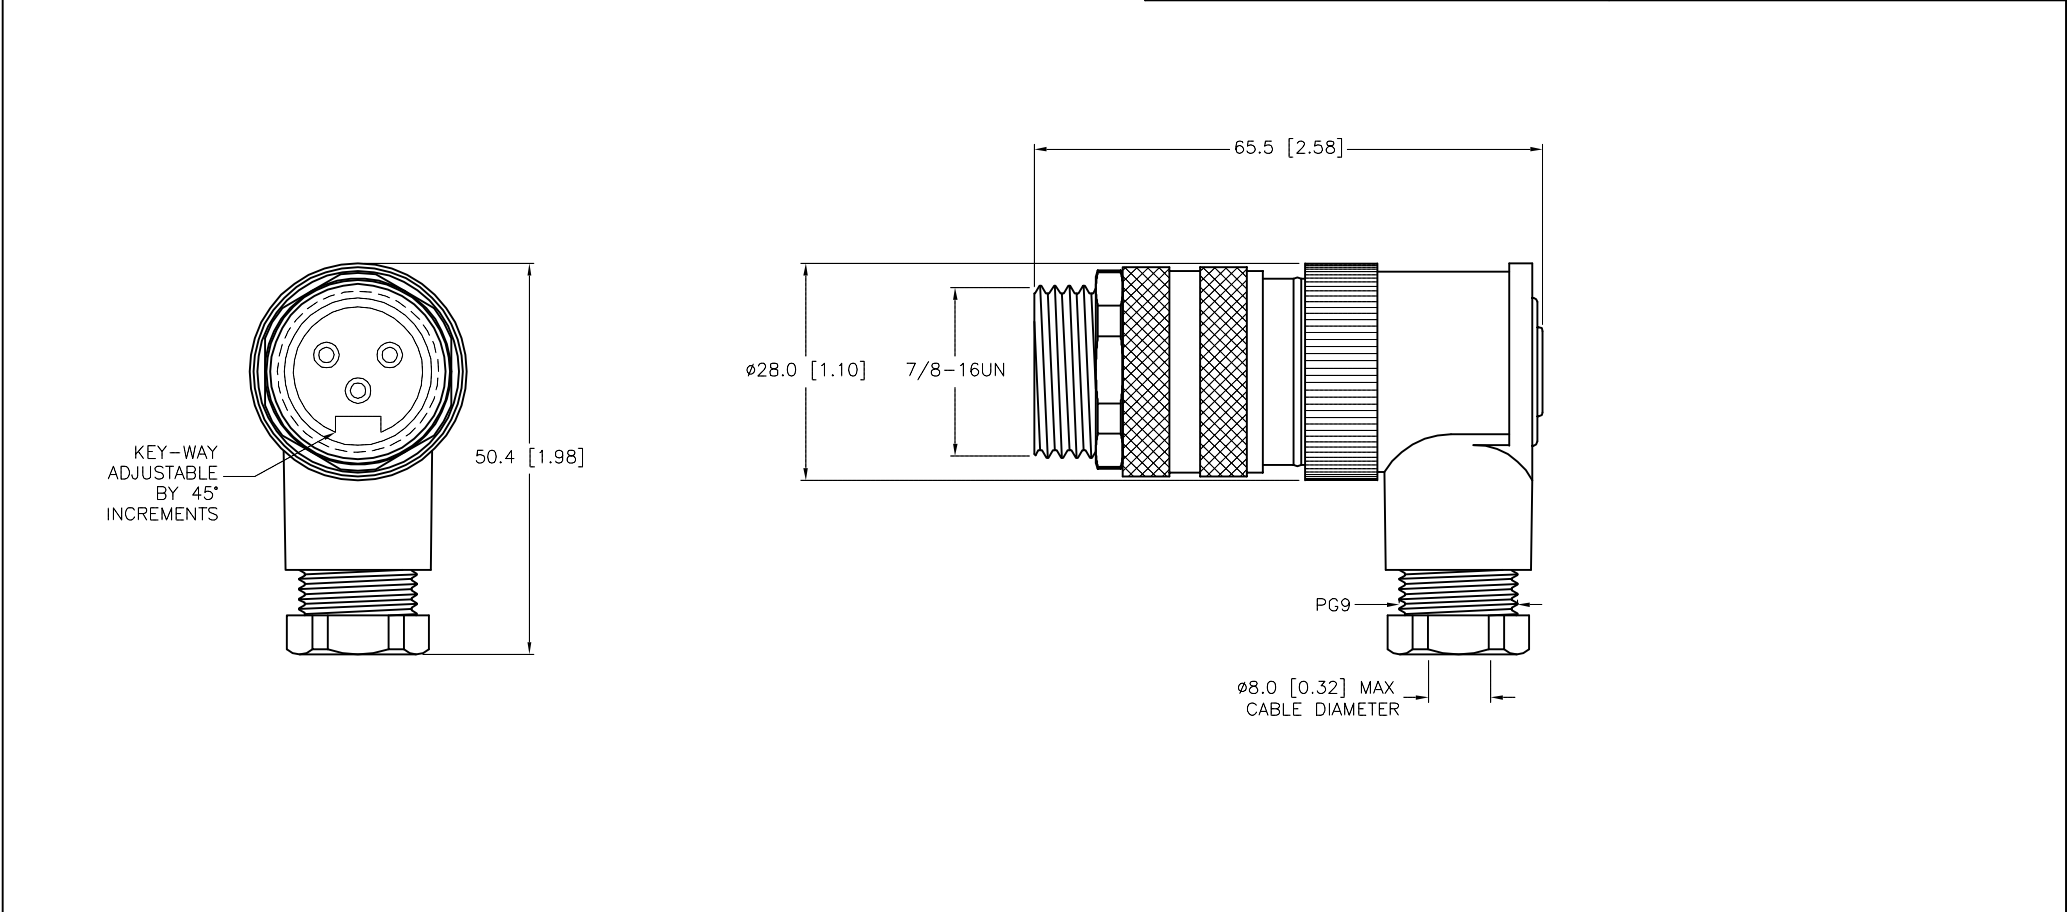


MALE END VIEW		SPECIFICATIONS	
		HOUSING MATERIAL/COLOR	NYLON or PBT/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
		RATED CURRENT [A]	12.0 A
		RATED VOLTAGE [V]	600 V
		MAXIMUM WIRE SIZE	16 AWG
		TERMINATION METHOD	SCREW TERMINAL
		CABLE GRIP RANGE	PG9 = 6-8mm
		TEMPERATURE RATING	-25°C to +85°C (-13°F to +185°F)
		PROTECTION CLASS	IP67



FIELD WIREABLE MINIFAST RIGHT-ANGLE CONNECTOR					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
					1. 2. 3. 4.						TURCK INC <i>High Technology Sensors and Automation Controls</i>			
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT JBJ		DATE 07/17/00		DESCRIPTION BS 4231-0/9	
					SEE SPECIFICATIONS				APVD		SCALE 1=1.0			
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
					SEE SPECIFICATIONS				MILLIMETER [INCH]		U6419-0		C	
									DO NOT SCALE THIS DRAWING		FILE: MINI-FW\U6419-0		SHEET 1 OF 1	
C	UPDATE VOLTAGE & TEMP			NF	02/19/15	49070								
REV	DESCRIPTION			BY	DATE	ECO NO.								