


MALE END VIEW




- 1 = BLUE (- VOLTAGE)
- 2 = BROWN (+ VOLTAGE)
- 3 = BARE (SHIELD)
- 4 = GREEN/YELLOW (GROUND)



FOUNDATION™
fieldbus

SPECIFICATIONS

HOUSING MATERIAL/COLOR	GLASS FILLED NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL	STAINLESS STEEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	16 AWG
TERMINATION METHOD	SCREW TERMINAL
CABLE GRIP RANGE	MODIFIED TO FIT 16 MM DIAM. CABLE
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP 67

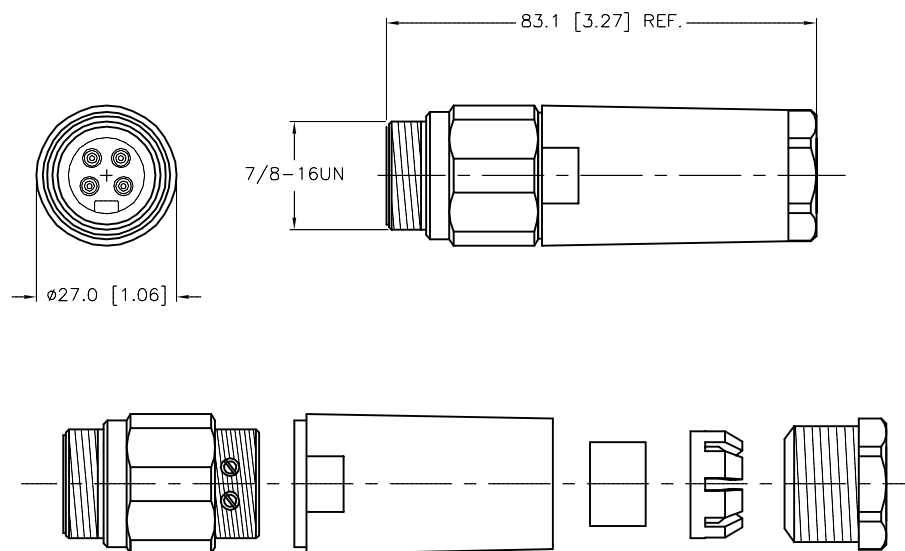

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. "/C1232" DESIGNATES FIELD WIRABLES WITH ENLARGED GROMMET.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us TURCK	DESCRIPTION BSV 4149-0/16/C1232
	MATERIAL SEE SPECIFICATIONS	DRFT MS APVD	DATE 03/29/06 SCALE 1=1.5		
FINISH SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U3-00765	REV B
CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: U3-00765	SHEET 1 OF 1

B	UPDATE GLAND GRIP BETWEEN GROMMET AND GLAND NUT	KMY	10/07/14	47531
REV	DESCRIPTION	BY	DATE	ECO. NO.