


## Accessories

### Actuation kit (puck)


### BTS-DSU35-EU1

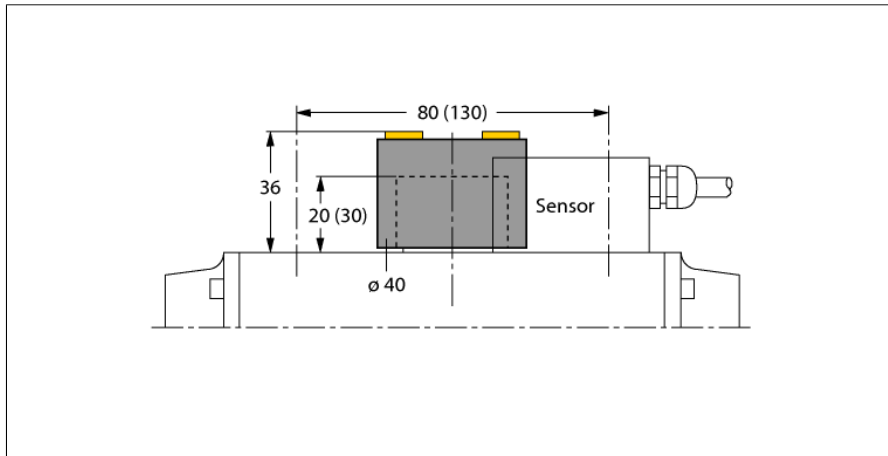

- End position undamped
- 1 button
- Hole pattern on flange surface: 30 x 80 mm (30 x 130 mm)
- Connection shaft (shaft extension) height: 20 mm/Ø: max. 30 mm
- Maximum slide ring diameter: 34 mm

#### General description

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.

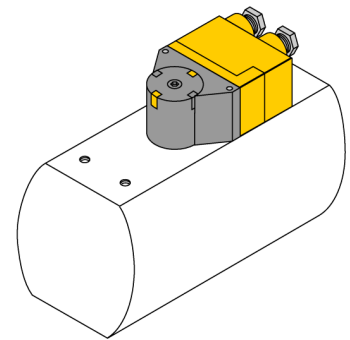

|                             |                                                                                  |
|-----------------------------|----------------------------------------------------------------------------------|
| <b>Type designation</b>     | BTS-DSU35-EU1                                                                    |
| Ident-No.                   | 6900227                                                                          |
| <b>Design</b>               | Accessories for dual sensors, Ni4-DSU35...                                       |
| Housing material            | Metal, AL, Anodized                                                              |
| Tightening torque           | ≤ 1.5 Nm                                                                         |
| <b>Included in delivery</b> | 2 Hex cap screw, M5 × 12, 2 pcs. D5 lock washers,<br>1 countersunk screw M6 × 25 |