
MALE END VIEW
3 2 1 (LONG)
mini iast.

SPECIFICATIONS						
HOUSING MATERIAL/COLOR	GLASS FILLED NYLON/BLACK					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	ANODIZED ALUMINUM					
RATED CURRENT [A]	12.0 A 600 V 16 AWG					
RATED VOLTAGE [V]						
MAXIMUM WIRE SIZE						
TERMINATION METHOD	SCREW TERMINAL					
TEMPERATURE RATING	-25°C to +85°C (-13°F to +185°F)					
PROTECTION CLASS	IP67					

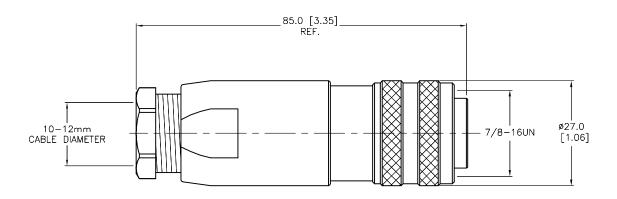

SOURCE DRAWING - FOR REFERENCE ONLY

							-	one brawing 1 on the b		
				RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technolog	PCK Inc. MIN y Sensors and Automation Controls	000 CAMPUS NNEAPOLIS, MI 1-800-544- (763) 553- (763) 553-(turck.con	N 55441 -7769 7300 0708 fax
				SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT RDS DATE 01/02/07		BY 4131-0/	13.5	
				FINISH	CONTACT TURCK FOR MORE	MILLIMETE	ER [INCH]	IDENTIFICATION NO. U0908-5	1	REV
_	UPDATE VOLTAGE & TEMP DESCRIPTION	+ + ' ' +	49070 ECO NO.	SEE SPECIFCATIONS	INFORMATION	DO NOT SCALE	THIS DRAWING	FILE: U0908-51	SHEET	T 1 OF 1