



FEMALE END VIEW



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	24 A
RATED VOLTAGE [V]	600 V
CABLE OUTSIDE DIAMETER	11-17mm
AWG SIZE	12-14 AWG
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	IEC IP67

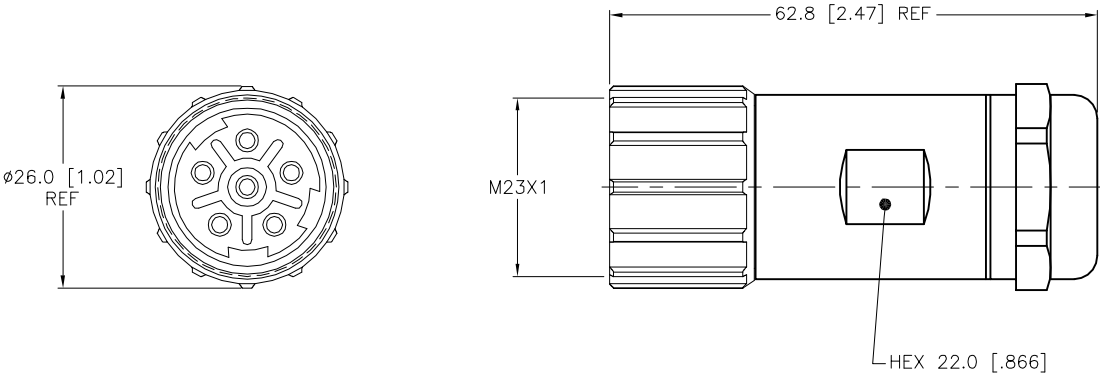


**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. THIS IS A FIELD WIREABLE CONNECTOR. ASSEMBLY REQUIRED BY END USER.

E	ADD NOTE	TR	12/06/19	75472
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
	MATERIAL		DRFT	RWC	DATE	10/10/05
			APVD		SCALE	1=1.0
			UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	MILLIMETER [INCH]		CK 62-0		
FINISH	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	REV	
SEE SPECIFICATIONS				U2-04271	E	
				FILE: U2-04271	SHEET 1 OF 1	