




A diagram showing the female end view of a circular connector. It features a circular outer shell with a central circular area containing 25 numbered pins. The pins are arranged in a circular pattern, with numbers 1 through 25. The diagram is labeled "FEMALE END VIEW" at the top.



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
GASKET	RUBBER (NBR or FPM)
RATED CURRENT [A]	5.0 A
RATED VOLTAGE [V]	150 V
MAX. CONDUCTORS SIZE	26/22 AWG
TERMINATION METHOD	SOLDER
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	IEC IP67
CABLE DIAMETERS	2mm TO 14.5mm (.571")

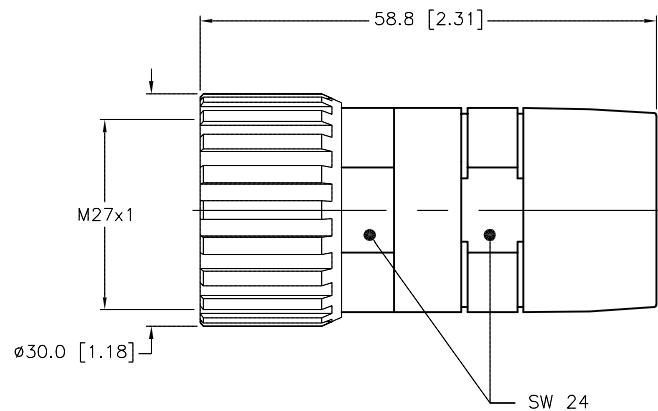

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	DD	DATE	01/13/04	DESCRIPTION DK 26-0		
		APVD		SCALE	1=1.0			
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U0906-96		REV A
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING						

A	DRAWING RELEASE	DD	01/19/04	
REV	DESCRIPTION	BY	DATE	ECO NO.