



MALE END VIEW




SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
GASKET	RUBBER (NBR or FPM)
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
MAX. CONDUCTORS SIZE	26/22 AWG
TERMINATION METHOD	SOLDER
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	IEC IP67
CABLE DIAMETERS	2mm TO 14.5mm (.571")

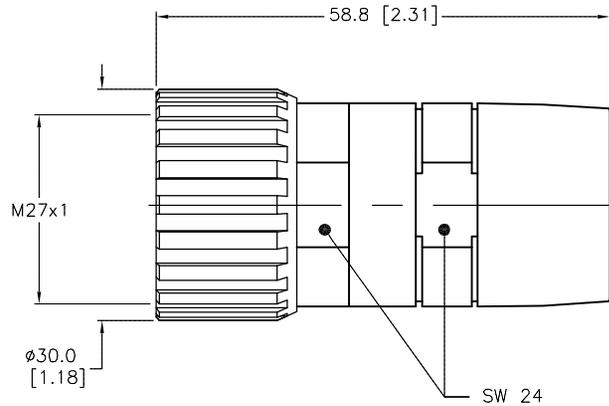

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.					DRFT DD
2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD		SCALE 1=1.0
3.		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.
4.			SEE SPECIFICATIONS	DO NOT SCALE THIS DRAWING	
MATERIAL					REV B
FINISH					FILE: M23\U0954-75
B	UPDATE RATED CURRENT SPECIFICATIONS	KMY	07/24/14	46464	SHEET 1 OF 1
REV	DESCRIPTION	BY	DATE	ECO NO.	