







SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PA 6 (NYLON)/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/FINISH	STAINLESS STEEL, PASSIVATED
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	30 VAC/36 VDC
CONDUCTORS [AWG]	24 AWG
CONDUCTOR INSULATION MATERIAL	PVC
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
GASKET MATERIAL	NITRILE (BUNA N)
ISOLATOR MATERIAL	NYLON

MALE END VIEW	FEMALE END VIEW
 <p>1 = WHITE/BLUE 2 = WHITE/BROWN 3 = BROWN 4 = ORANGE (-TX) 5 = WHITE/GREEN (+RX) 6 = WHITE/ORANGE (+TX) 7 = BLUE 8 = GREEN (-RX)</p>	 <p>1 = WHITE/BLUE 2 = WHITE/BROWN 3 = BROWN 4 = ORANGE (-TX) 5 = WHITE/GREEN (+RX) 6 = WHITE/ORANGE (+TX) 7 = BLUE 8 = GREEN (-RX)</p>
	



1. TYPICAL PANEL CUT-OUT USING ISOLATORS IS 0.625 DIA. HOLE.					2. TYPICAL PANEL CUT-OUT WITHOUT ISOLATORS IS 0.50 DIA. HOLE.				
D	UPDATE PINOUT COLORS, SEE ECO	RWC	10/29/09	28632					
REV	DESCRIPTION	BY	DATE	ECO NO.					

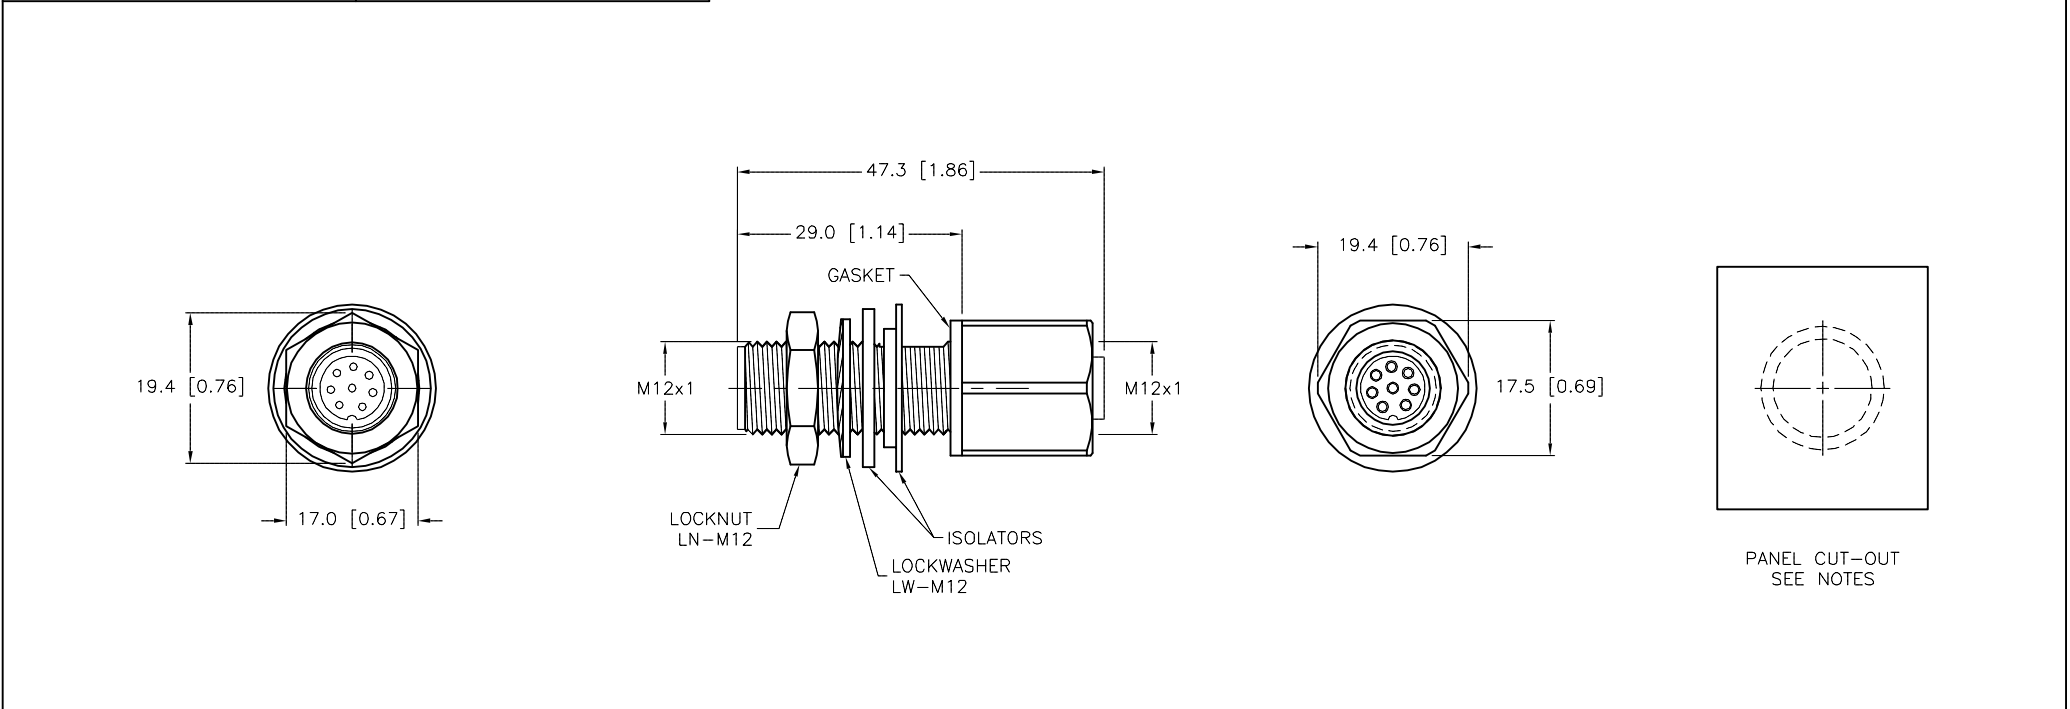RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT RDS		DATE 05/06/04	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD DF		SCALE 1=1	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION FKV FSV 84/M12	
				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U9621	
						REV D	
						FILE: U9621	
						SHEET 1 OF 1	