




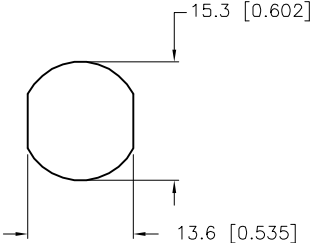
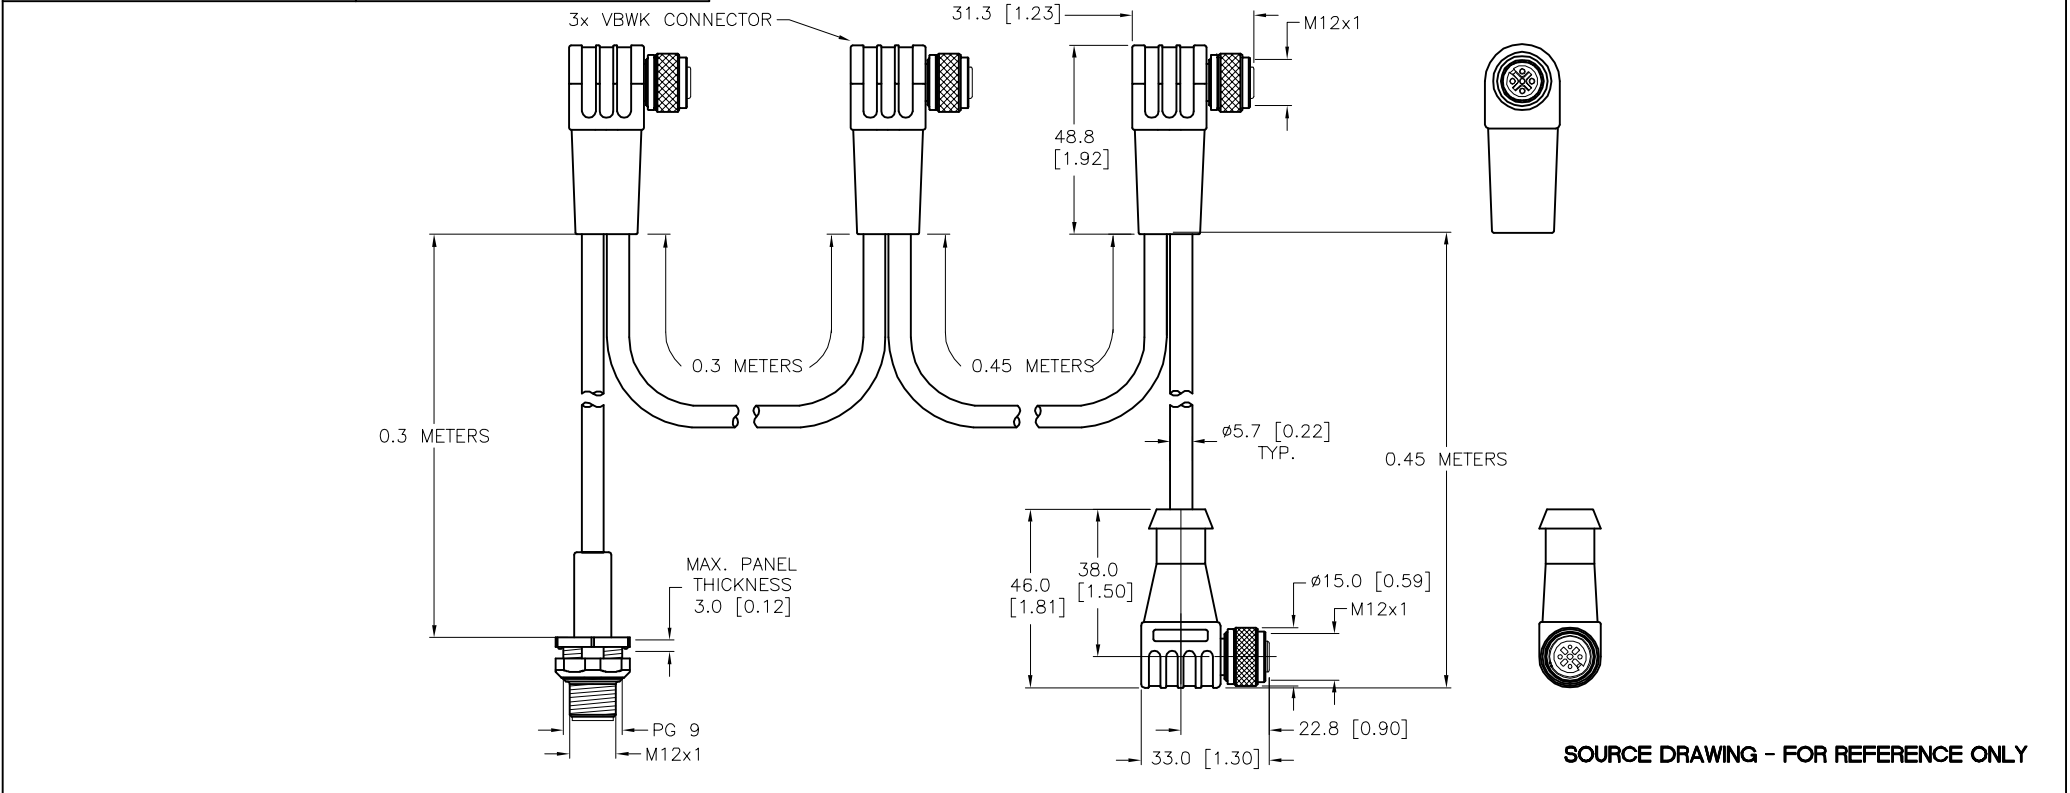


MALE END VIEW	FEMALE END VIEW	PANEL CUTOUT	SPECIFICATIONS	
 <p>1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)</p> 	 <p>1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)</p> 		CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED VOLTAGE [V]	250 V
			RATED CURRENT [A]	4.0 A
			OUTER JACKET MATERIAL/COLOR	PVC/GRAY
			CONDUCTOR INSULATION MATERIAL	HDPE (DATA), PVC (POWER)
			CONDUCTORS [AWG]	4x24 AWG, 24 AWG DRAIN
			SHIELDING	FOIL (PAIRS) , FOIL (OVERALL)
			TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68



- NOTES:
- "DCL2" = DESIGNATES CUSTOM LENGTHS AS NOTED ON DRAWING.
  - VBWK CONNECTOR CABLE EXITS OPPOSITE PIN 2.

F	UPDATE J4 PER ECO	TR	04/24/20	500000000232
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS  1.  2.  3.  4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div>TURCK</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>			
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY  CONTACT TURCK FOR MORE INFORMATION	DRFT	RDS	DATE	09/30/08	DESCRIPTION  FSFD 3VBWK WKC 5724-DCL2	
		APVD		SCALE	1=2.0		
FINISH		UNIT OF MEASUREMENT  MILLIMETER [ INCH ]  DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.  U2-14744		REV  F
					FILE: U2-14744		SHEET 1 OF 1