

FEMALE END VIEW
3 2 2 4 1
Protect.

SPECIFICATIONS						
CONTACT CARRIER MATERIAL/COLOR	PVC/NYLON, BLACK					
GLAND MATERIAL/COLOR	NYLON/BLACK					
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
SEAL MATERIAL/COLOR	NITRILE/BLACK					
RATED CURRENT [A]	UP TO 35.0 A					
RATED VOLTAGE [V]	600 V					
MAXIMUM WIRE SIZE	8 AWG					
TERMINATION METHOD	SCREW TERMINAL					
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)					
PROTECTION CLASS	IP 67/NEMA 6P					
CABLE GRIP RANGE	9.0mm [0.35"] to 26.0mm [1.02"]					

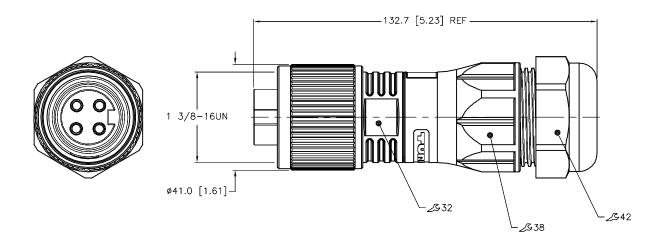



RDS 04/22/20

DATE

75819

ECO NO.

C UPDATE RATED CURRENT

REV DESCRIPTION

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC	(763) (763)	LIS, MN -544-7 553-7	55441 7769 300 708 fax
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	APVD	DATE 09/10/09 SCALE 1=1.5	DESCRIPTION (	GKDM 40-0		
FINISH	REFERENCE ONLY  CONTACT TURCK FOR MORE	MILLIMETER [ INCH ]		IDENTIFICATION NO.	U2-14827		REV
SEE SPECIFICATIONS	INFORMATION	DO NOT SCALE	THIS DRAWING	FILE: U2-14827		SHEET	1 OF 1