


Solenoid Driver 1-channel IM72-11EX/L

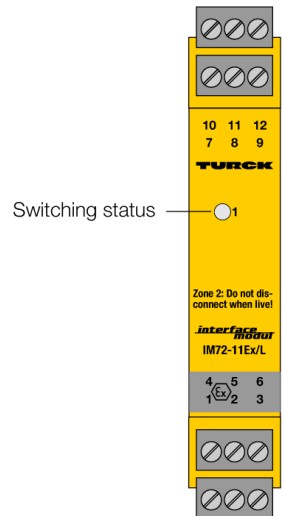

The IM72-11EX/L solenoid driver provides an intrinsically safe output voltage limited in current and voltage. Loads in the Ex area can thus be supplied directly.

Within the area of applicability of the European directive 2014/34/EU (ATEX) it is permitted to operate connected loads in potentially explosive atmospheres caused by dust or gas, provided they comply with the applicable regulations.

Typical applications are the control of Ex i pilot valves as well as the supply of displays and transmitters. The output values of the two connections U1 and U2 per channel differ in terms of their no-load voltage and are adapted to the valves of different manufacturers (see output curve on next page).

The loads are actuated by applying the operating voltage.

A yellow LED indicates the switching state of the associated output.


- ATEX, IECEx, UL, cFM_{us} TR CU, NEPSI, INMETRO, Kosha
- Installation in zone 2
- Voltage input max. 30 VDC
- Voltage output 15 VDC resp. 24 VDC
- Output current ≤ 40 mA
- Switching frequency ≤ 500 Hz
- SIL3
- Removable terminal blocks
- Galvanic isolation between input circuits and output circuits

Solenoid Driver

1-channel

IM72-11EX/L

Dimensions



Type designation	IM72-11EX/L
Ident-No.	7520703
Nominal voltage	24 VDC loop-powered
Power consumption	≤ 1.5 W
Power dissipation, typ.	≤ 0.75 W
0-signal	0...5 VDC
1-signal	19...30 VDC
Voltage input	max. 30 VDC
Input current	45 mA
Input delay	≤ 2 ms
Output circuits	intrinsically safe acc. to EN 60079
Output current	40 mA
Output voltage	U ₁ =24 V
Output voltage	U ₂ =15 V
Output curve	
Limit frequency	≤ 500 Hz
Galvanic isolation	
Test voltage	2.5 kV
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	TÜV 05 ATEX 2846 X
Application area	II (1) GD
Ignition protection category	[EEx ia] IIC
Ex approval acc. to conformity certificate	TÜV 06 ATEX 553388 X
Application area	II 3 G
Ignition protection type	Ex nA [nL] IIC/IIB T4
Characteristic	trapezoidal
Characteristic	trapezoidal
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Approval	SIL 3 acc. to EXIDA FMEDA
Use in SIL safety circuits	SIL 3 acc. to IEC 61508
Approval	SIL 3 acc. to EXIDA FMEDA
Indication	
Switching state	Yellow

Solenoid Driver
1-channel
IM72-11EX/L

Protection class	IP20
Flammability class acc. to UL 94	V-0
Ambient temperature	-25...+70 °C
	-25 ... +60 °C für UL, FM
Storage temperature	-40...+80 °C
Dimensions	104 x 18 x 110 mm
Weight	127 g
Mounting instructions	DIN rail (NS35) or panel
Housing material	Polycarbonate/ABS
Electrical connection	4 × 3-pin removable terminal blocks, reverse polarity protected, screw terminal
Terminal cross-section	1 x 2.5 mm ² / 2 x 1.5 mm ²
Tightening torque	0.5 Nm

Solenoid Driver
1-channel
IM72-11EX/L

Accessories

Type code	Ident-No.	Description	Dimension drawing
IM-CC-3X2BU/2BK	6900475	Cage clamp terminals for IM modules (Ex-devices with 18 mm overall width); includes: 2 pcs. 3-pin blue terminals and 2 pcs. 3-pin black terminals.	