
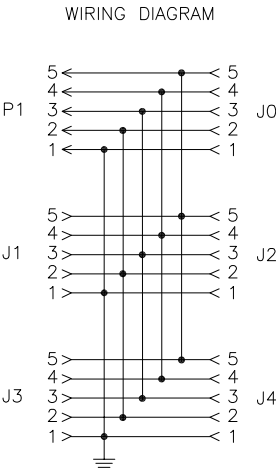
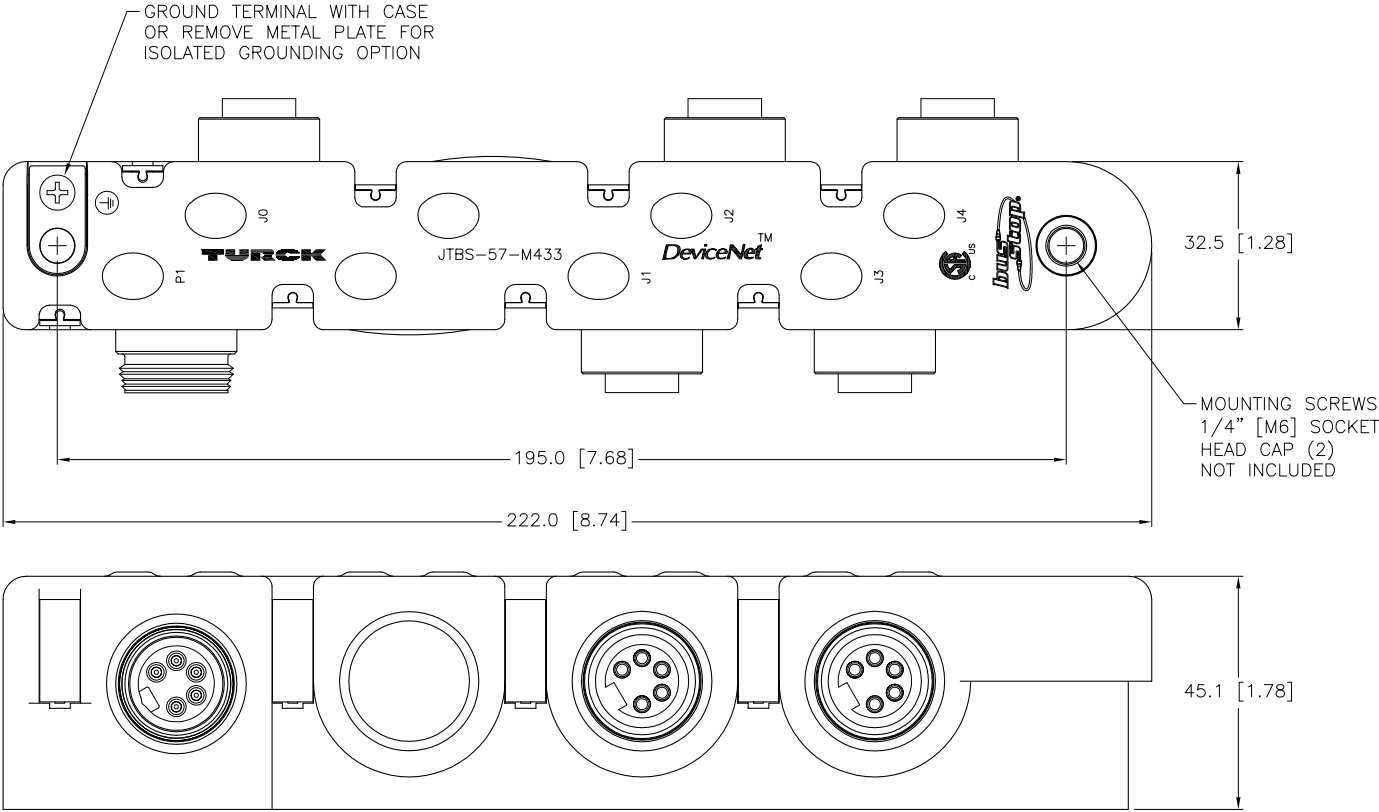


P1 CONNECTOR		FEMALE (J0-J4) CONNECTOR		SPECIFICATIONS	
 <p>1 = SHIELD 2 = + VOLTAGE 3 = - VOLTAGE 4 = CAN H 5 = CAN L</p>		 <p>1 = (SHIELD) 2 = (+ VOLTAGE) 3 = (- VOLTAGE) 4 = (CAN_H) 5 = (CAN_L)</p>		HOUSING MATERIAL/COLOR	TPU/BLACK
 DeviceNet™		 DeviceNet™		RECEPTACLE HOUSING/PLATING	STAINLESS STEEL/PASSIVATED
				CONTACT CARRIERS	TPU
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				OPERATING VOLTAGE	300V
				OPERATING CURRENT	9.0 A PER CONNECTOR
				PROTECTION CLASS	NEMA 1,3,4,6,13 AND IEC IP67
				OPERATING TEMPERATURE	-30°C to 80°C (-22°F to 176°F)



					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 03/19/02		DESCRIPTION JTBS-57-M433	
									APVD GC		SCALE 1=1.5			
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U7865-43		REV D	
											DO NOT SCALE THIS DRAWING		FILE: U7865-43	
D	UPDATE GROUND TERMINAL NOTE			KMY	10/26/11	36879								
REV	DESCRIPTION			BY	DATE	ECO NO.								