



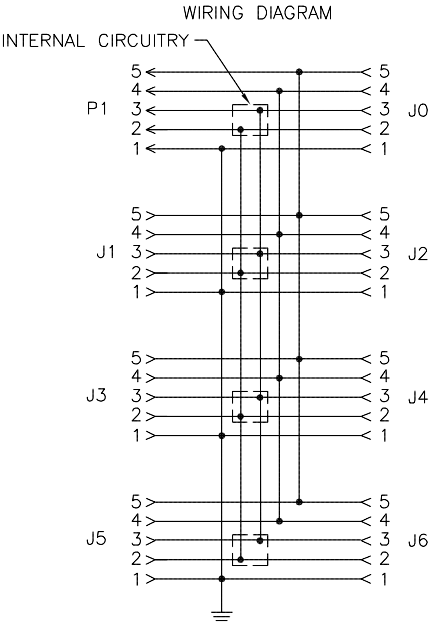
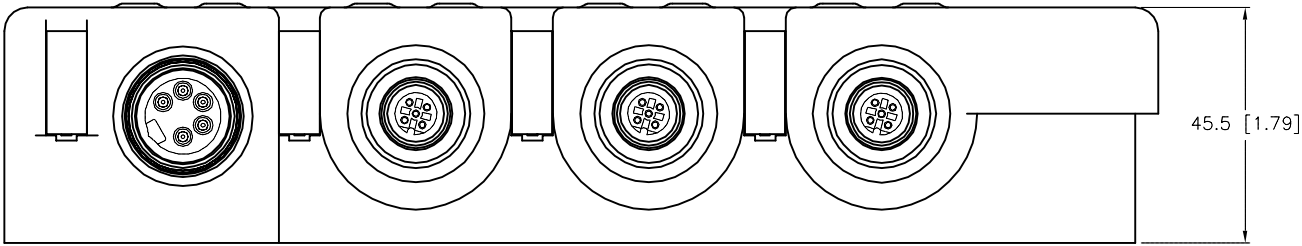


MALE (P1) CONNECTOR	FEMALE (J0) CONNECTOR	FEMALE (J1-J6) CONNECTORS	SPECIFICATIONS	
			HOUSING MATERIAL/COLOR	TPU/BLACK
			RECEPTACLE HOUSING/PLATING	BRASS/NICKEL
			CONTACT CARRIERS	TPU (P1,P0), NYLON (J1-J6)
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			OPERATING VOLTAGE	35 VDC
			OPERATING CURRENT	4.0 A PER CONNECTOR
			PROTECTION CLASS	NEMA 1,3,4,6,13 AND IEC IP67
			OPERATING TEMPERATURE	-30°C to 80°C (-22°F to 176°F)
			LED INDICATION, FLASHING AMBER	< 12.9 V
			LED INDICATION, GREEN	21.9-25.6 V
			LED INDICATION, AMBER	> 25.6 V


GROUND TERMINAL WITH CASE
OR REMOVE METAL PLATE FOR
ISOLATED GROUNDING OPTION

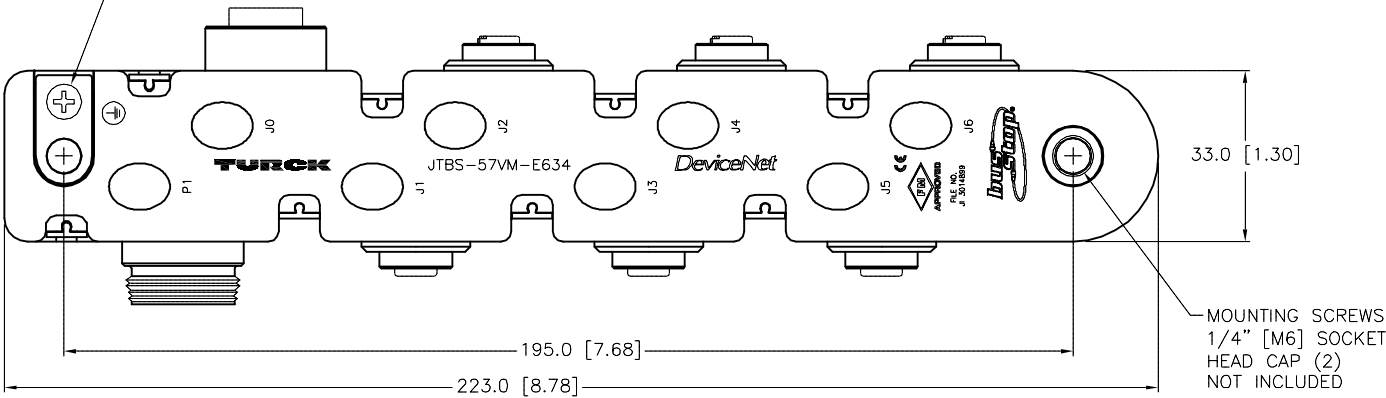

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. INTERNAL VOLTAGE MONITORING CIRCUITRY IS LOCATED BETWEEN PINS 2 AND 3.

NOTES: 1. INTERNAL VOLTAGE MONITORING CIRCUITRY IS LOCATED BETWEEN PINS 2 AND 3.	RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div>TURCK</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>			
	1. 2. 3. 4.											
	MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 06/04/02		DESCRIPTION JTBS-57VM-E634	
							APVD GC		SCALE 1 = 1.5			
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV		
								U8683-64		G		
G	UPDATED NOTES AND WIRING DIAGRAM PER ECO			TV	08/26/16	56165	DO NOT SCALE THIS DRAWING		FILE: U8683-64		SHEET 1 OF 1	
REV	DESCRIPTION			BY	DATE	ECO NO.						