



FEMALE CONNECTOR - END VIEW	SPECIFICATIONS	
	HOUSING MATERIAL/PLATING	PBT/BLACK
	CONTACT MATERIAL/PLATING	NICKEL PLATED BRASS
	COUPLING NUT MATERIAL/PLATING	NICKEL PLATED BRASS
	RATED CURRENT [A]	4.0 A
	RATED VOLTAGE [V]	250 V
	MAXIMUM WIRE SIZE	18 AWG
	CABLE GRIP RANGE	4-6 mm
	TEMPERATURE RATING	-40°C to +85°C (-40°F to +185°F)
	PROTECTION CLASS	MEETS NEMA 1,3,4,6,13 AND IEC IP67
	SPACINGS [VDE 0110 b]	250 VAC/300 VDC, Gr. C

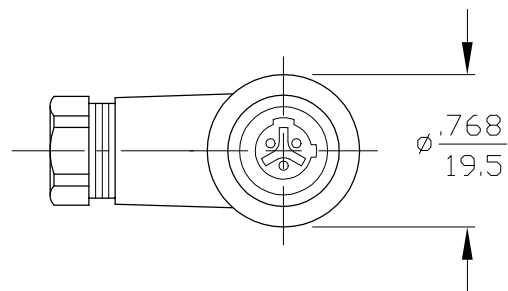

SPECIFICATIONS	
HOUSING MATERIAL/PLATING	PBT/BLACK
CONTACT MATERIAL/PLATING	NICKEL PLATED BRASS
COUPLING NUT MATERIAL/PLATING	NICKEL PLATED BRASS
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
MAXIMUM WIRE SIZE	18 AWG
CABLE GRIP RANGE	4-6 mm
TEMPERATURE RATING	-40°C to +85°C (-40°F to +185°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6,13 AND IEC IP67
SPACINGS [VDE 0110 b]	250 VAC/300 VDC, Gr. C



MATERIAL		3RD ANGLE PROJECTION		TURCK INC 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 PHONE: (763) 553-7300	
FINISH					
DRFT	SWC	DATE	9/6/95		
DSGN		Y#	PART NO./DESCR. MF 3231-0		
		SIZE	ID NO.		REV
		A	U5591		
DIMENSION UNITS: INCHES [MILLIMETERS]		SCALE	NONE MIC\U5591		SHEET OF