

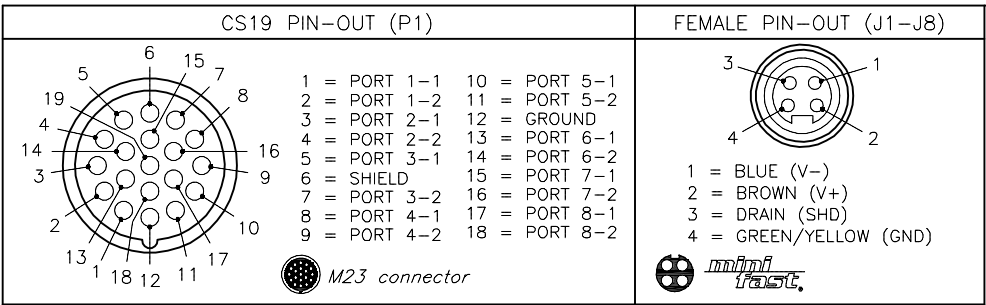




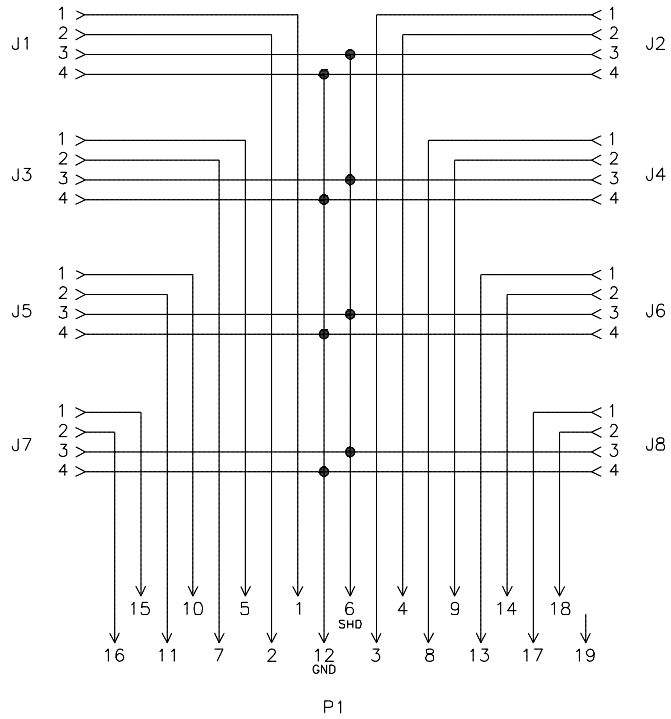


SPECIFICATIONS	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPT. HSG MAT'L/FINISH (J1-J8)	STAINLESS STEEL/PASSIVATED
RECEPT. HSG MAT'L/FINISH (P1)	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR (J1-J8)	TPU/BLACK
CONTACT CARRIER/COLOR (P1)	NYLON or PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD (ALL)
OPERATING VOLTAGE	150 V
OPERATING CURRENT	3.0 A
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +80°C (-40°F to +176°F)

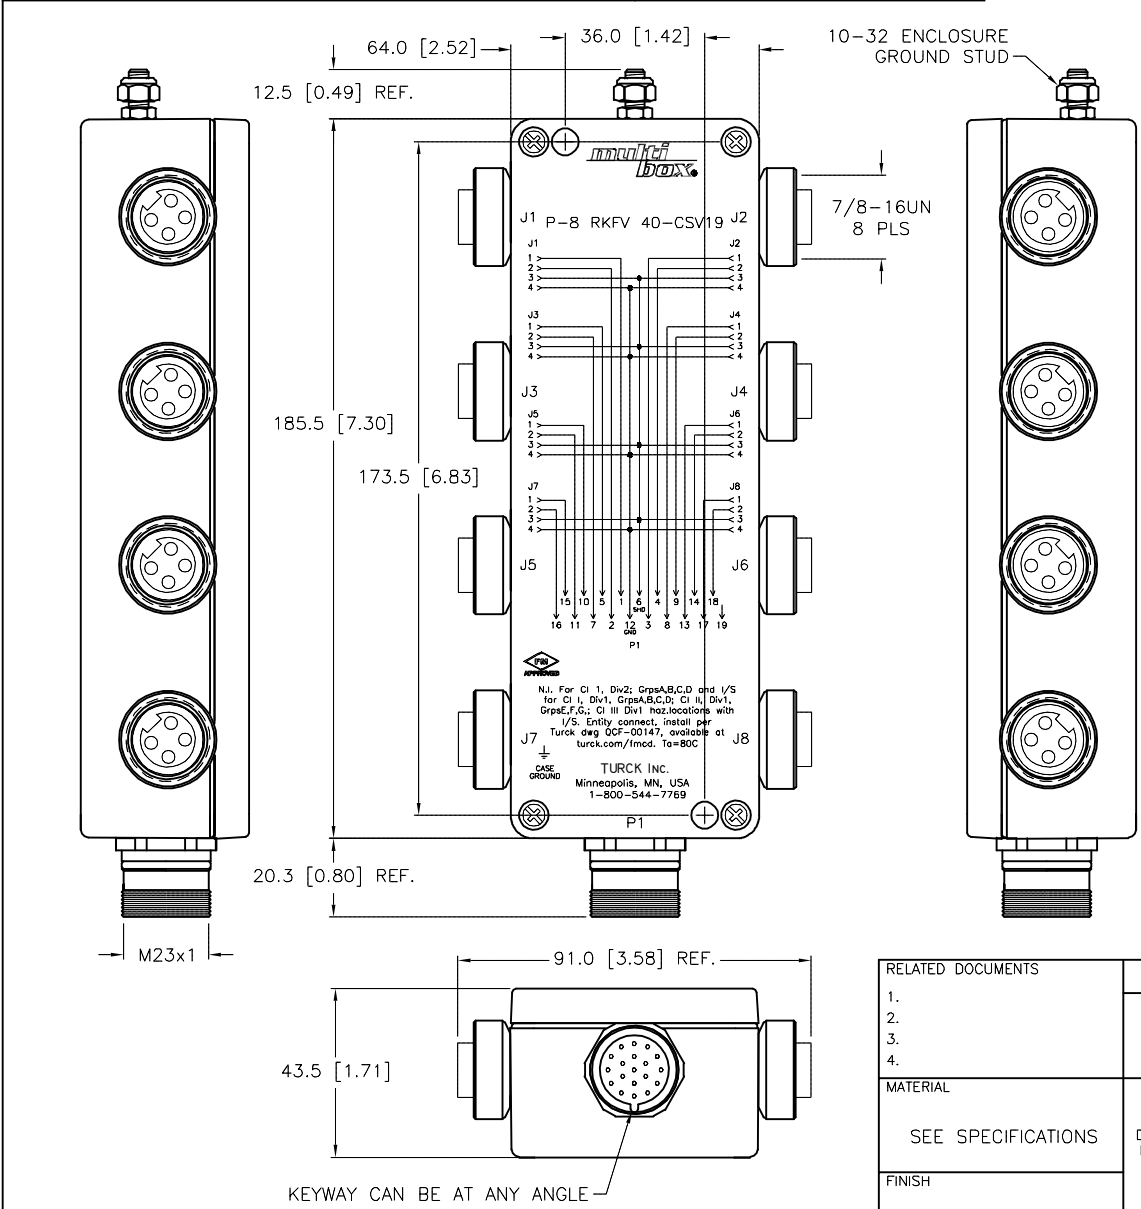

SOURCE DRAWING - FOR REFERENCE ONLY

G	UPDATE TEMPERATURE RATING	NF	03/26/19	68987
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT DD	DATE 12/03/03	DESCRIPTION P-8 RKFV 40-CSV19		
FINISH SEE SPECIFICATIONS			APVD DD	SCALE 1=2.0			
	CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U0945-32		REV G
					FILE: U0945-32		SHEET 1 OF 1