


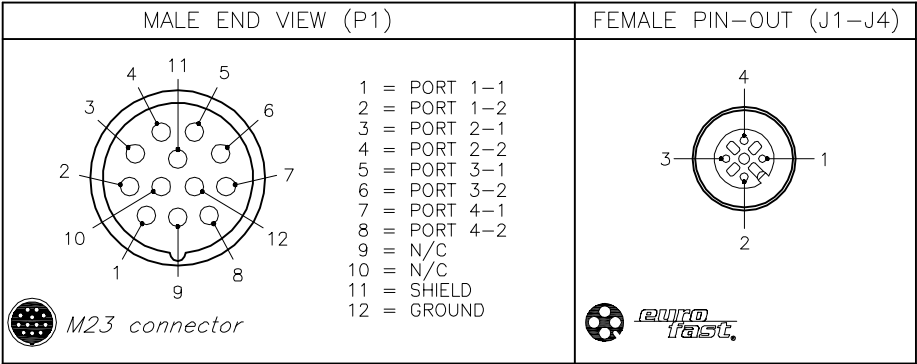
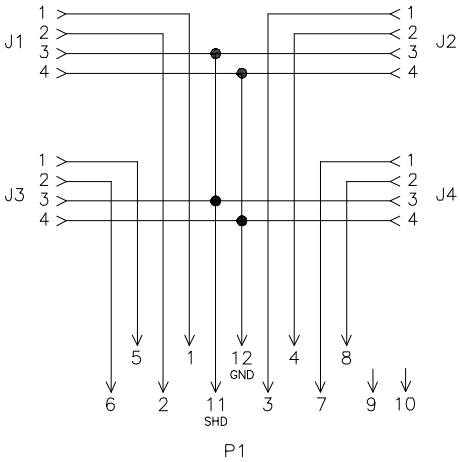


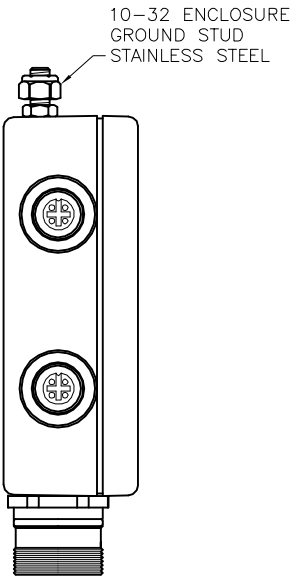

SPECIFICATIONS	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSINGS	STAINLESS STEEL
CONTACT CARRIERS/COLOR (J1-J4)	NYLON/BLACK
CONTACT CARRIER/COLOR (P1)	NYLON or PBT/WHITE
CONTACTS	GOLD-PLATED BRASS (ALL)
OPERATING VOLTAGE	250 VAC/300 VDC
OPERATING CURRENT	4.0 AMPS PER PORT, 8.0 AMPS TOTAL
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

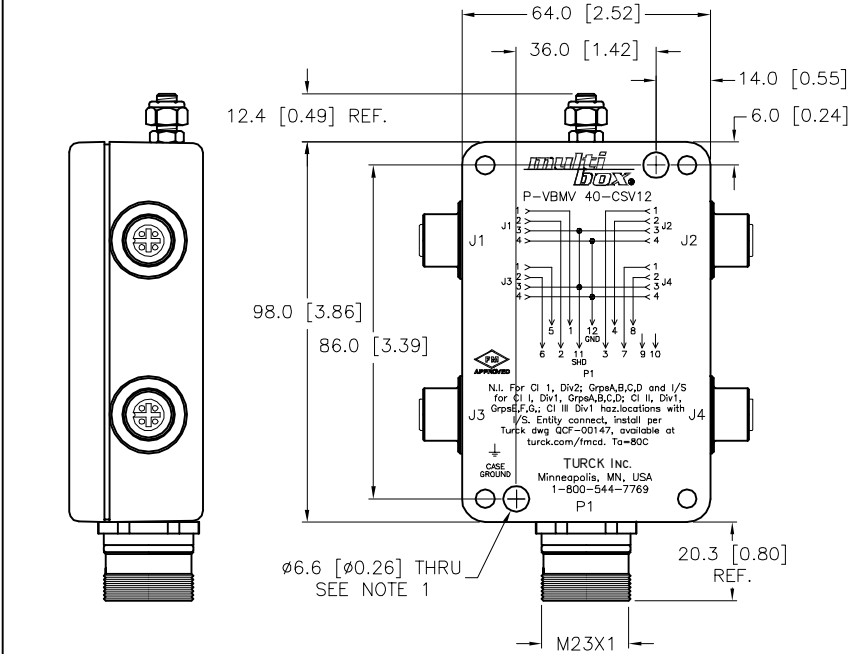

WIRING DIAGRAM

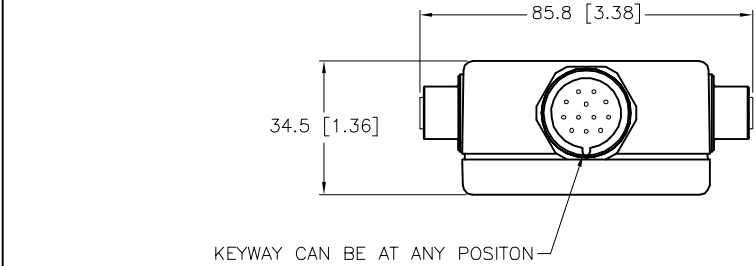

NOTES:

1. CLEARENCE HOLE FOR 1/4-20 MOUNTING SCREWS (2 NOT INCLUDED).

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				MATERIAL		DRFT DD		DATE 12/11/03	
SEE SPECIFICATIONS				FINISH		APVD		SCALE 1=2.0	
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION P-VMV 40-CSV12	
						DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U0945-33	
								REV B	
								FILE: U0945-33	
								SHEET 1 OF 1	